




NO SKIVE		HSC	SWAGED NON SKIVE FERRULE BOCCOLA A PRESSARE NON SKIVE									
	TIEFFE Part. N°	Hose I.D. Ø Interno tubo			Dimensions (mm)		Applications Applicazioni					
		DN	SIZE	Inch	D	L						
	HSC04	6	04	1/4"	19	23	1SC					
	HSC05	8	05	5/16"	20	27,5	1SC					
	HSC06	10	06	3/8"	23	30	1SC					
	HSC08	12	08	1/2"	26,5	32	1SC					
	HSC10	16	10	5/8"	29	35	1SC					
	HSC12	19	12	3/4"	33	34	1SC					
	HSC16	25	16	1"	42	45	1SC					

NO SKIVE		HXT1	SWAGED NON SKIVE FERRULE BOCCOLA A PRESSARE NON SKIVE									
	TIEFFE Part. N°	Hose I.D. Ø Interno tubo			Dimensions (mm)		Applications Applicazioni					
		DN	SIZE	Inch	D	L						
	HXT103	5	03	3/16"	19	24	1SN	R1AT				
	HXT104	6	04	1/4"	20	27	1SN	R1AT	2SC			
	HXT105	8	05	5/16"	22	27,5	1SN	R1AT	2SC			
	HXT106	10	06	3/8"	24,5	30	1SN	R1AT	2SC			
	HXT108	12	08	1/2"	28	32,5	1SN	R1AT	2SC			
	HXT110	16	10	5/8"	32	35	1SN	R1AT	2SC			
	HXT112	19	12	3/4"	36	40	1SN	R1AT	2SC			
	HXT116	25	16	1"	45	50	1SN	R1AT	2SC			
	HXT120	31	20	1 1/4"	54	50	1SN	R1AT				
	HXT124	38	24	1 1/2"	62	55	1SN	R1AT				
	HXT132	51	32	2"	76	60	1SN	R1AT				

NO SKIVE		HXT	SWAGED NON SKIVE FERRULE BOCCOLA A PRESSARE NON SKIVE									
	TIEFFE Part. N°	Hose I.D. Ø Interno tubo			Dimensions (mm)		Applications Applicazioni					
		DN	SIZE	Inch	D	L						
	HXT03	5	03	3/16"	20	24	2SN	R2AT				
	HXT04	6	04	1/4"	22	26	2SN	R2AT	1SN	R1AT	2SC	
	HXT05	8	05	5/16"	24	27,5	2SN	R2AT	1SN	R1AT	2SC	
	HXT06	10	06	3/8"	26	30	2SN	R2AT	1SN	R1AT	2SC	
	HXT08	12	08	1/2"	30	32,5	2SN	R2AT	1SN	R1AT	2SC	
	HXT10	16	10	5/8"	34	35	2SN	R2AT	1SN	R1AT	2SC	
	HXT12	19	12	3/4"	38	40	2SN	R2AT	1SN	R1AT	2SC	
	HXT16	25	16	1"	48	50	2SN	R2AT				
	HXT20	31	20	1 1/4"	60	57	2SN	R2AT				
	HXT24	38	24	1 1/2"	67	62	2SN	R2AT				
	HXT32	51	32	2"	80	66	2SN	R2AT				


For SAE100 R16 - SAE100 R17 and other compact braided hoses applications, contact TIEFFE.

Voor toepassing van SAE100 R16-SAE100 R17slang neem contact op met FLEXTUBO

SCHILLEN

H4..

SWAGED SKIVE FERRULE SCHILHULS OM TE PERSEN




TIEFFE Part. N°	Hose I.D. Ø Interno tubo			Dimensions (mm)		Applications Toepassing					
	DN	SIZE	Inch	D	L						
H404	6	04	1/4"	22	30	4SP	R9R**				
H406	10	06	3/8"	26	32,5	4SP	R9R**		R12	2ST	R2A
H408	12	08	1/2"	30	35	4SP	R9R**		R12	2ST	R2A
H410	16	10	5/8"	34	38,5	4SP	R9R**		R12	2ST	R2A
H412	19	12	3/4"	38	43,5	4SP	R9R**	4SH**	R12	2ST	R2A
H416	25	16	1"	46	54	4SP	R9R**	4SH**	R12	2ST	R2A
H420	31	20	1 1/4"	56	61	4SP			R12	2ST	R2A
H424	38	24	1 1/2"	65	68	4SP			R12	2ST	R2A
H432	51	32	2"	78	74	4SP					

SCHILLEN

BXSH


SWAGED SKIVE FERRULE SCHILHULS OM TE PERSEN




TIEFFE Part. N°	Hose I.D. Ø Interno tubo			Dimensions (mm)		Applications Toepassing					
	DN	SIZE	Inch	D	L						
H6SH20	31	20	1 1/4"	54	61		R9R**	4SH**			
H6SH24	38	24	1 1/2"	62	69		R9R**	4SH**			
H6SH32	51	32	2"	76	74		R9R**	4SH**	R12	2ST	R2A

** The application of "CX" series hose connectors must be limited to the "DIN856 4SP" maximum working pressure.

De toepassing van de CX serie moet beperkt blijven tot "DIN 856 4SP"


BS 5200	AGR	BSP PARALLEL MALE - 60° CONE SEAT MASCHIO GAS (BSP) CILINDRICO - SVASATO 60°												
		TIEFFE Part.N.	Hose I.D. Ø interno tubo			Thread Filettatura		Dimensions (mm)					Maximum W.P.	
			DN	Size	Inch	F		H	L	S			bar	PSI
	XBM0203	5	03	3/16"	1/8"-28		20	45	14			415	6000	
	XBM0403	5	03	3/16"	1/4"-19		24	49	19			415	6000	
	XBM0204	6	04	1/4"	1/8"-28		20	48	14			415	6000	
	XBM0404	6	04	1/4"	1/4"-19		25	53	19			450	6500	
	XBM0604	6	04	1/4"	3/8"-19		27	55	22			450	6500	
	XBM0804	6	04	1/4"	1/2"-14		32	60	27			450	6500	
	XBM0405	8	05	5/16"	1/4"-19		25	53	19			350	5000	
	XBM0605	8	05	5/16"	3/8"-19		27	55	22			350	5000	
	XBM0805	8	05	5/16"	1/2"-14		32	60	27			350	5000	
	XBM0406	10	06	3/8"	1/4"-19		25	55	19			450	6500	
	XBM0606	10	06	3/8"	3/8"-19		27	58	22			450	6500	
	XBM0806	10	06	3/8"	1/2"-14		32	62	27			450	6500	
	XBM0608	12	08	1/2"	3/8"-19		28	61	22			415	6000	
	XBM0808	12	08	1/2"	1/2"-14		33	66	27			415	6000	
	XBM1008	12	08	1/2"	5/8"-14		35	68	30			415	6000	
	XBM1208	12	08	1/2"	3/4"-14		36	69	32			415	6000	
	XBM1008	16	10	5/8"	1/2"-14		33	69	27			350	5000	
	XBM1010	16	10	5/8"	5/8"-14		35	71	30			350	5000	
	XBM1210	16	10	5/8"	3/4"-14		36	72	32			350	5000	
	XBM0812	20	12	3/4"	1/2"-14		34	74	27			350	5000	
	XBM1012	20	12	3/4"	5/8"-14		36	76	30			350	5000	
	XBM1212	20	12	3/4"	3/4"-14		37	77	32			350	5000	
	XBM1612	20	12	3/4"	1"-11		42	82	41			350	5000	
	XBM1216	25	16	1"	3/4"-14		38	89	32			280	4000	
	XBM1616	25	16	1"	1"-11		43	94	41			280	4000	
	XBM2016	25	16	1"	1 1/4"-11		46	97	50			280	4000	
	XBM2020	32	20	1 1/4"	1 1/4"-11		47	105	50			210	3000	
	XBM2420	32	20	1 1/4"	1 1/2"-11		50	108	55			210	3000	
	XBM2424	40	24	1 1/2"	1 1/2"-11		50	115	55			185	2700	
	XBM3224	40	24	1 1/2"	2"-11		55	119	70			185	2700	
	XBM3232	50	32	2"	2"-11		56	126	70			165	2400	



BSP TAPS

AGR-K

BSP TAPER MALE - 60° CONE SEAT BSP TAPS TOELOPENDE BU.DR. - 60° CONUS




TIEFFE Part.N.	Hose I.D. Ø interno tubo			Thread Filettatura F	Dimensions (mm)					Maximum W.P.	
	DN	Size	Inch		H	L	S			bar	PSI
XBT0203	5	03	3/16"	1/8"-28	20	45	12			415	6000
XBT0403	5	03	3/16"	1/4"-19	25	50	15			415	6000
XBT0204	6	04	1/4"	1/8"-28	21	49	12			450	6500
XBT0404	6	04	1/4"	1/4"-19	25	53	15			450	6500
XBT0604	6	04	1/4"	3/8"-19	26	54	19			450	6500
XBT0405	8	05	5/16"	1/4"-19	25	53	15			350	5000
XBT0605	8	05	5/16"	3/8"-19	26	54	19			350	5000
XBT0406	10	06	3/8"	1/4"-19	26	56	15			450	6500
XBT0606	10	06	3/8"	3/8"-19	27	57	19			450	6500
XBT0806	10	06	3/8"	1/2"-14	32	63	22			415	6000
XBT0608	12	08	1/2"	3/8"-19	28	64	19			415	6000
XBT0808	12	08	1/2"	1/2"-14	33	66	22			415	6000
XBT0810	16	10	5/8"	1/2"-14	33	69	22			350	5000
XBT1210	16	10	5/8"	3/4"-14	35	71	27			350	5000
XBT1212	20	12	3/4"	3/4"-14	36	77	27			350	5000
XBT1612	20	12	3/4"	1"-11	41	82	36			280	4000
XBT1616	25	16	1"	1"-11	43	94	36			280	4000
XBT2016	25	16	1"	1 1/4"-11	47	98	46			210	3000
XBT2020	32	20	1 1/4"	1 1/4"-11	48	106	46			210	3000
XBT2424	40	24	1 1/2"	1 1/2"-11	49	114	50			185	2700
XBT3223	50	32	2"	2"-11	57	127	65			165	2400


BSP VLAK

AGR FLAT SEAT


BSP PARALLEL MALE - FLAT SEAT BSP PARALLELE BU.DR. - VLAKKE ZITTING



TIEFFE Part.N.	Hose I.D. Ø interno tubo			Thread Filettatura F	Dimensions (mm)						
	DN	Size	Inch		H	L	S				
XBMP0404	6	04	1/4"	1/4"-19	25	53	19				
XBMP0604	6	04	1/4"	3/8"-19	27	55	22				
XBMP0605	8	05	5/16"	3/8"-19	27	55	22				
XBMP0606	10	06	3/8"	3/8"-19	27	58	22				
XBMP0806	10	06	3/8"	1/2"-14	32	62	27				
XBMP0808	12	08	1/2"	1/2"-14	33	66	27				
XBMP1008	12	08	1/2"	5/8"-14	35	68	30				
XBMP1208	12	08	1/2"	3/4"-14	36	69	32				
XBMP1010	16	10	5/8"	5/8"-14	35	71	30				
XBMP1210	16	10	5/8"	3/4"-14	36	72	32				
XBMP1212	20	12	3/4"	3/4"-14	37	77	32				
XBMP1612	20	12	3/4"	1"-11	42	82	41				
XBMP1616	25	16	1"	1"-11	43	94	41				
XBMP2020	32	20	1 1/4"	1 1/4"-11	47	105	50				

BS 5200	DKR	BSP STRAIGHT FEMALE - 60° CONE FEMMINA DIRITTA BSP (GAS) - OGIVA 60°												
		TIEFFE Part.N.	Hose I.D. Ø interno tubo			Thread Filettatura	Nut Dado	Dimensions (mm)					Maximum W.P.	
			DN	Size	Inch	F		H	L	S			bar	PSI
	XBF0203	5	03	3/16"	1/8"-28	P	16	41	14			415	6000	
	XBF0403	5	03	3/16"	1/4"-19	P	19	44	19			415	6000	
	XBF0204	6	04	1/4"	1/8"-28	P	17	45	14			415	6000	
	XBF0404	6	04	1/4"	1/4"-19	P	19	47	19			450	6500	
	XBF0604	6	04	1/4"	3/8"-19	P	22	50	22			450	6500	
	XBF0804	6	04	1/4"	1/2"-14	P	23	51	27			450	6500	
	XBF0405	8	05	5/16"	1/4"-19	P	19	47	19			350	5000	
	XBF0605	8	05	5/16"	3/8"-19	P	22	50	22			350	5000	
	XBF0805	8	05	5/16"	1/2"-14	P	23	51	27			350	5000	
	XBF0406	10	06	3/8"	1/4"-19	P	19	49	19			450	6500	
	XBF0606	10	06	3/8"	3/8"-19	P	21	51	22			450	6500	
	XBF0806	10	06	3/8"	1/2"-14	P	23	54	27			450	6500	
	XBF0608	12	08	1/2"	3/8"-19	P	22	56	22			415	6000	
	XBF0808	12	08	1/2"	1/2"-14	P	23	56	27			415	6000	
	XBF1008	12	08	1/2"	5/8"-14	P	24	57	30			415	6000	
	XBF1208	12	08	1/2"	3/4"-14	P	27	60	32			415	6000	
	XBF0810	16	10	5/8"	1/2"-14	P	23	59	27			350	5000	
	XBF1010	16	10	5/8"	5/8"-14	P	23	59	30			350	5000	
	XBF1210	16	10	5/8"	3/4"-14	P	27	63	32			350	5000	
	XBF0812	20	12	3/4"	1/2"-14	P	24	65	27			350	5000	
	XBF1012	20	12	3/4"	5/8"-14	P	24	64	30			350	5000	
	XBF1212	20	12	3/4"	3/4"-14	P	27	67	32			350	5000	
	XBF1612	20	12	3/4"	1"-11	P	30	70	41			350	5000	
	XBF1216	25	16	1"	3/4"-14	P	28	79	32			280	4000	
	XBF1616	25	16	1"	1"-11	P	30	81	41			280	4000	
	XBF2016	25	16	1"	1 1/4"-11	P	35	86	50			280	4000	
	XBF2020	32	20	1 1/4"	1 1/4"-11	P	34	92	50			210	3000	
	XBF2420	32	20	1 1/4"	1 1/2"-11	P	36	93	55			210	3000	
	XBF2424	40	24	1 1/2"	1 1/2"-11	P	34	99	55			185	2700	
	XBF3224	40	24	1 1/2"	2"-11	P	39	103	70			185	2700	
	XBF3232	50	32	2"	2"-11	P	37	107	70			165	2400	

P - Pressed nut (Dado pressato)




P - Pressed nut (Dado pressato)

BS 5200

DKR

BSP STRAIGHT FEMALE - 60° CONE BSP RECHT FEMALE MET LOSSE MOER 60° CONUS




L - Loose nut (Dado libero)
S - TIEFFE nut (Dado TIEFFE)

TIEFFE Part.N.	Hose I.D. Ø interno tubo			Thread Filettatura F	Nut Dado	Dimensions (mm)					Maximum W.P.	
	DN	Size	Inch			H	L	S			bar	PSI
XBF0404L	6	04	1/4"	1/4"-19	L	19	47	19			450	6500
XBF0604L	6	04	1/4"	3/8"-19	L	19	47	22			450	6500
XBF0605L	8	05	5/16"	3/8"-19	L	19	47	22			350	5000
XBF0606L	10	06	3/8"	3/8"-19	L	19	50	22			450	6500
XBF0806L	10	06	3/8"	1/2"-14	L	21	52	27			450	6500
XBF0808L	12	08	1/2"	1/2"-14	L	22	55	27			415	6000
XBF1008S	12	08	1/2"	5/8"-14	S	24	57	30			415	6000
XBF1010S	16	10	5/8"	5/8"-14	S	23	59	30			350	5000
XBF1210S	16	10	5/8"	3/4"-14	S	27	63	32			350	5000
XBF1212S	20	12	3/4"	3/4"-14	S	27	67	32			350	5000
XBF1612S	20	12	3/4"	1"-11	S	31	72	41			350	5000
XBF1616S	25	16	1"	1"-11	S	31	82	41			280	4000

BS 5200

DKOR

BSP STRAIGHT FEMALE - 60° O'RING CONE BSP RECHT FEMALE MET LOSSE MOER EN ORING - 60° CONUS



L - Loose nut (Dado libero)
S - TIEFFE nut (Dado TIEFFE)

TIEFFE Part.N.	Hose I.D. Ø interno tubo			Thread Filettatura F	Nut Dado	Dimensions (mm)					Maximum W.P.	
	DN	Size	Inch			H	L	S		O'Ring	bar	PSI
XBF0404OL	6	04	1/4"	1/4"-19	L	22	50	19		6,5x1	450	6500
XBF0604OL	6	04	1/4"	3/8"-19	L	24	52	22		8,5x1,5	450	6500
XBF0605OL	8	05	5/16"	3/8"-19	L	24	52	22		8,5x1,5	350	5000
XBF0606OL	10	06	3/8"	3/8"-19	L	24	54	22		8,5x1,5	450	6500
XBF0806OL	10	06	3/8"	1/2"-14	L	26	56	27		11,5x1,5	450	6500
XBF0808OL	12	08	1/2"	1/2"-14	L	26	59	27		11,5x1,5	415	6000
XBF1008OS	12	08	1/2"	5/8"-14	S	26	59	30		13x1,5	415	6000
XBF1010OS	16	10	5/8"	5/8"-14	S	25	61	30		13x1,5	350	5000
XBF1210OS	16	10	5/8"	3/4"-14	S	28	64	32		17x1,5	350	5000
XBF1212OS	20	12	3/4"	3/4"-14	S	28	68	32		17x1,5	350	5000
XBF1612OS	20	12	3/4"	1"-11	S	32	73	41		22x1,5	280	4000
XBF1616OS	25	16	1"	1"-11	S	32	83	41		22x1,5	280	4000
XBF2016OS	25	16	1"	1 1/4"-11	S	37	88	50		28,3x1,78	280	4000
XBF2020OS	32	20	1 1/4"	1 1/4"-11	S	36	94	50		28,3x1,78	210	3000
XBF2420OS	32	20	1 1/4"	1 1/2"-11	S	39	97	55		33,05x1,78	210	3000
XBF2424OS	40	24	1 1/2"	1 1/2"-11	S	38	102	55		33,05x1,78	185	2700
XBF3224OS	40	24	1 1/2"	2"-11	S	41	105	70		44,17x1,78	185	2700
XBF3232OS	50	32	2"	2"-11	S	40	110	70		44,17x1,78	165	2400

JIS B 8363

DKR

JIS BSP STRAIGHT FEMALE (NISSAN) - 60° CONE SEAT

JIS BSP RECHT FEMALE (NISSAN) - 60° CONUS

S

S1

F

H

L

TIEFFE
Part.N.

Hose I.D.
Ø interno tubo

DN

Size

Inch

Thread
Filettatura

F

Nut
Dado

Dimensions
(mm)

H

L

S

S1

Maximum
W.P.

bar

PSI

XBFJ0403	5	03	3/16"	1/4"-19	P	23	48	19	14		415	6000
XBFJ0404	6	04	1/4"	1/4"-19	P	24	52	19	14		450	6500
XBFJ0604	6	04	1/4"	3/8"-19	P	26	54	22	17		450	6500
XBFJ0605	8	05	5/16"	3/8"-19	P	26	54	22	17		350	5000
XBFJ0606	10	06	3/8"	3/8"-19	P	26	57	22	17		450	6500
XBFJ0806	10	06	3/8"	1/2"-14	P	29	60	27	22		450	6500
XBFJ0808	12	08	1/2"	1/2"-14	P	30	63	27	22		415	6000
XBFJ1210	16	10	5/8"	3/4"-14	P	35	71	32	27		350	5000
XBFJ1212	20	12	3/4"	3/4"-14	P	36	76	32	27		350	5000
XBFJ1616	25	16	1"	1"-11	P	40	91	41	32		280	4000
XBFJ2020	32	20	1 1/4"	1 1/4"-11	P	46	104	50	41		210	3000
XBFJ2424	40	24	1 1/2"	1 1/2"-11	P	47	112	55	46		185	2700
XBFJ3232	50	32	2"	2"-11	P	53	123	70	60		165	2400

P - Pressed nut (Dado pressato)

P - Pressed nut (Dado pressato)

BSP FLAT SEAT

DKR

FLAT SEAT

BSP STRAIGHT FEMALE - FLAT SEAT

BSP RECHT FEMALE - VLAK

TIEFFE

Part.N.

Hose I.D.

Ø interno tubo

DN

Size

Inch

Thread

Filettatura

F

Nut

Dado

P

Dimensions

(mm)

H

L

S

XBP0404

6

04

1/4"

1/4"-19

P

15

43

19

XBP0604

6

04

1/4"

3/8"-19

P

18

46

22

XBP0605

8

05

5/16"

3/8"-19

P

18

46

22

XBP0606

10

06

3/8"

3/8"-19

P

17

47

22

XBP0806

10

06

3/8"

1/2"-14

P

19

49

27

XBP0808

12

08

1/2"

1/2"-14

P

19

52

27

XBP1008

12

08

1/2"

5/8"-14

P

21

54

30

XBP1208

12

08

1/2"

3/4"-14

P

23

56

32

XBP1010

16

10

5/8"

5/8"-14

P

20

56

30

XBP1210

16

10

5/8"

3/4"-14

P

23

59

32

XBP1212

20

12

3/4"

3/4"-14

P

22

63

32

XBP1612

20

12

3/4"

1"-11

P

25

65

41

XBP1616

25

16

1"

1"-11

P

25

76

41

XBP2424

32

20

1 1/4"

1 1/4"-11

P

28

90

50

S

F

H

L


P - Pressed nut (Dado pressato)

P - Pressed nut (Dado pressato)

BS 5200


DKR45

45° BSP SWEPT ELBOW - 60° CONE
45° GEBOGEN BSP SLANGKOPPELING - 60° CONUS



TIEFFE Part.N.	Hose I.D. Ø interno tubo			Thread Filettatura F	Nut Dado P	Dimensions (mm)					Maximum W.P.	
	DN	Size	Inch			H	L	K	S		bar	PSI
XBF450302	5	03	3/16"	1/8"-28	P	33	58	14	14		415	6000
XBF450402	5	03	3/16"	1/4"-19	P	35	60	16	19		415	6000
XBF450204	6	04	1/4"	1/8"-28	P	36	64	16	14		415	6000
XBF450404	6	04	1/4"	1/4"-19	P	37	65	16	19		450	6500
XBF450604	6	04	1/4"	3/8"-19	P	40	68	19	22		450	6500
XBF450804	6	04	1/4"	1/2"-14	P	42	70	21	27		450	6500
XBF450405	8	05	5/16"	1/4"-19	P	39	67	18	19		350	5000
XBF450605	8	05	5/16"	3/8"-19	P	41	69	19	22		350	5000
XBF450805	8	05	5/16"	1/2"-14	P	43	71	21	27		350	5000
XBF450406	10	06	3/8"	1/4"-19	P	41	72	18	19		450	6500
XBF450606	10	06	3/8"	3/8"-19	P	42	73	19	22		450	6500
XBF450806	10	06	3/8"	1/2"-14	P	44	75	21	27		450	6500
XBF450608	12	08	1/2"	3/8"-19	P	49	82	22	22		415	6000
XBF450808	12	08	1/2"	1/2"-14	P	49	82	22	27		415	6000
XBF451008	12	08	1/2"	5/8"-14	P	49	82	22	30		415	6000
XBF451208	12	08	1/2"	3/4"-14	P	53	86	26	32		415	6000
XBF450810	16	10	5/8"	1/2"-14	P	57	93	26	27		350	5000
XBF451010	16	10	5/8"	5/8"-14	P	54	90	24	30		350	5000
XBF451210	16	10	5/8"	3/4"-14	P	57	93	26	32		350	5000
XBF450812	20	12	3/4"	1/2"-14	P	68	108	30	27		350	5000
XBF451012	20	12	3/4"	5/8"-14	P	66	106	28	30		350	5000
XBF451212	20	12	3/4"	3/4"-14	P	66	106	28	32		350	5000
XBF451612	20	12	3/4"	1"-11	P	68	108	30	41		350	5000
XBF451216	25	16	1"	3/4"-14	P	87	138	38	32		280	4000
XBF451616	25	16	1"	1"-11	P	84	135	36	41		280	4000
XBF452016	25	16	1"	1 1/4"-11	P	85	136	37	50		280	4000
XBF452020	32	20	1 1/4"	1 1/4"-11	P	100	157	43	50		210	3000
XBF452420	32	20	1 1/4"	1 1/2"-11	P	100	157	43	55		210	3000
XBF452424	40	24	1 1/2"	1 1/2"-11	P	116	180	49	55		185	2700
XBF453224	40	24	1 1/2"	2"-11	P	116	180	49	70		185	2700
XBF453232	50	32	2"	2"-11	P	150	220	62	70		165	2400

P - Pressed nut (Dado pressato)

BS 5200		DKR45	45° BSP SWEPT ELBOW - 60° CONE 45° GEBOGEN SLANGKOPPELING MET WARTEL-60° CONUS									
	TIEFFE Part.N.	Hose I.D. Ø interno tubo			Thread Filettatura	Nut Dado	Dimensions (mm)				Maximum W.P.	
		DN	Size	Inch	F		H	L	K	S	bar	PSI
	XBF450404L	6	04	1/4"	1/4"-19	L	35	63	13	19	450	6500
	XBF450604L	6	04	1/4"	3/8"-19	L	36	64	14	22	450	6500
	XBF450605L	8	05	5/16"	3/8"-19	L	37	65	14	22	350	5000
	XBF450606L	10	06	3/8"	3/8"-19	L	38	68	14	22	450	6500
	XBF450806L	10	06	3/8"	1/2"-14	L	41	71	17	27	450	6500
	XBF450808L	12	08	1/2"	1/2"-14	L	44	77	18	27	415	6000
	XBF451008S	12	08	1/2"	5/8"-14	S	49	82	23	30	415	6000
	XBF451010S	16	10	5/8"	5/8"-14	S	54	90	23	30	350	5000
	XBF451210S	16	10	5/8"	3/4"-14	S	57	93	26	32	350	5000
	XBF451212S	20	12	3/4"	3/4"-14	S	66	106	29	32	350	5000
	XBF451612S	20	12	3/4"	1"-11	S	68	109	31	41	350	5000
	XBF451616S	25	16	1"	1"-11	S	84	135	36	41	280	4000

L - Loose nut (Dado libero)

S - TIEFFE nut (Dado TIEFFE)

BS 5200

DKOR45

45° BSP SWEPT ELBOW - 60° O'RING CONE

45° GEBOGEN SLANGKOPPELING MET WARTEL-60° CONUS MET ORING

TIEFFE Part.N.	Hose I.D. Ø interno tubo			Thread Filettatura	Nut Dado	Dimensions (mm)					Maximum W.P.	
	DN	Size	Inch	F		H	L	K	S	O'Ring	bar	PSI
XBF450404OL	6	04	1/4"	1/4"-19	L	35	63	13	19	6,5x1	450	6500
XBF450604OL	6	04	1/4"	3/8"-19	L	37	65	15	22	8,5x1,5	450	6500
XBF450605OL	8	05	5/16"	3/8"-19	L	38	66	15	22	8,5x1,5	350	5000
XBF450606OL	10	06	3/8"	3/8"-19	L	39	69	15	22	8,5x1,5	450	6500
XBF450806OL	10	06	3/8"	1/2"-14	L	41	71	18	27	11,5x1,5	450	6500
XBF450808OL	12	08	1/2"	1/2"-14	L	45	78	18	27	11,5x1,5	415	6000
XBF451008OL	12	08	1/2"	5/8"-14	S	51	84	24	30	13x1,5	415	6000
XBF451010OS	16	10	5/8"	5/8"-14	S	55	91	24	30	13x1,5	350	5000
XBF451210OS	16	10	5/8"	3/4"-14	S	58	94	27	32	17x1,5	350	5000
XBF451212OS	20	12	3/4"	3/4"-14	S	66	107	29	32	17x1,5	350	5000
XBF451612OS	20	12	3/4"	1"-11	S	69	110	32	41	22x1,5	350	5000
XBF451616OS	25	16	1"	1"-11	S	85	136	37	41	22x1,5	280	4000
XBF452016OS	25	16	1"	1 1/4"-11	S	86	137	38	50	28,3x1,78	280	4000
XBF452020OS	32	20	1 1/4"	1 1/4"-11	S	99	157	43	50	28,3x1,78	210	3000
XBF452420OS	32	20	1 1/4"	1 1/2"-11	S	99	157	43	55	33,05x1,78	210	3000
XBF452424OS	40	24	1 1/2"	1 1/2"-11	S	118	182	51	55	33,05x1,78	185	2700
XBF453224OS	40	24	1 1/2"	2"-11	S	118	182	51	70	44,17x1,78	185	2700
XBF453232OS	50	32	2"	2"-11	S	153	223	65	70	44,17x1,78	165	2400

L - Loose nut (Dado libero)

S - TIEFFE nut (Dado TIEFFE)


L - Loose nut (Dado libero)

S - TIEFFE nut (Dado TIEFFE)

BS 5200

DKR90


90° BSP SWEPT ELBOW - 60° CONE
90° GEBOGEN SLANGKOPPELING BSP - 60° CONUS



TIEFFE Part.N.	Hose I.D. Ø interno tubo			Thread Filettatura	Nut Dado	Dimensions (mm)					Maximum W.P.	
	DN	Size	Inch	F		H	L	K	S		bar	PSI
XBF900203	5	03	3/16"	1/8"-28	P	21	46	23	14		415	6000
XBF900403	5	03	3/16"	1/4"-19	P	21	46	26	19		415	6000
XBF900204	6	04	1/4"	1/8"-28	P	26	54	28	14		415	6000
XBF900404	6	04	1/4"	1/4"-19	P	26	54	28	19		450	6500
XBF900604	6	04	1/4"	3/8"-19	P	26	54	32	22		450	6500
XBF900804	6	04	1/4"	1/2"-14	P	26	54	36	27		450	6500
XBF900405	8	05	5/16"	1/4"-19	P	28	56	31	19		350	5000
XBF900605	8	05	5/16"	3/8"-19	P	28	56	34	22		350	5000
XBF900805	8	05	5/16"	1/2"-14	P	28	56	37	27		350	5000
XBF900406	10	06	3/8"	1/4"-19	P	31	61	34	19		450	6500
XBF900606	10	06	3/8"	3/8"-19	P	31	61	35	22		450	6500
XBF900806	10	06	3/8"	1/2"-14	P	31	61	38	27		450	6500
XBF900608	12	08	1/2"	3/8"-19	P	37	70	42	22		415	6000
XBF900808	12	08	1/2"	1/2"-14	P	37	70	42	27		415	6000
XBF901008	12	08	1/2"	5/8"-14	P	37	70	43	30		415	6000
XBF901208	12	08	1/2"	3/4"-14	P	37	70	48	32		415	6000
XBF900810	16	10	5/8"	1/2"-14	P	45	80	50	27		350	5000
XBF901010	16	10	5/8"	5/8"-14	P	45	80	46	30		350	5000
XBF901210	16	10	5/8"	3/4"-14	P	45	80	50	32		350	5000
XBF900812	20	12	3/4"	1/2"-14	P	54	95	59	27		350	5000
XBF901012	20	12	3/4"	5/8"-14	P	54	95	56	30		350	5000
XBF901212	20	12	3/4"	3/4"-14	P	54	95	56	32		350	5000
XBF901612	20	12	3/4"	1"-11	P	54	95	59	41		350	5000
XBF901216	25	16	1"	3/4"-14	P	70	121	75	32		280	4000
XBF901616	25	16	1"	1"-11	P	70	121	72	41		280	4000
XBF902016	25	16	1"	1 1/4"-11	P	70	121	73	50		280	4000
XBF902020	32	20	1 1/4"	1 1/4"-11	P	84	142	87	50		210	3000
XBF902420	32	20	1 1/4"	1 1/2"-11	P	84	142	87	55		210	3000
XBF902424	40	24	1 1/2"	1 1/2"-11	P	100	165	100	55		185	2700
XBF903224	40	24	1 1/2"	2"-11	P	100	165	100	70		185	2700
XBF903232	50	32	2"	2"-11	P	134	204	131	70		165	2400

P - Pressed nut (Dado pressato)

BS 5200



L - Loose nut (Dado libero)


S - TIEFFE nut (Dado TIEFFE)

DKR90

90° BSP SWEPT ELBOW - 60° CONE 90° GEBOGEN SLANGKOPPELING BSP - 60° CONUS

TIEFFE Part.N.	Hose I.D. Ø interno tubo			Thread Filettatura F	Nut Dado	Dimensions (mm)					Maximum W.P.	
	DN	Size	Inch			H	L	K	S		bar	PSI
XBF900404L	6	04	1/4"	1/4"-19	L	29	57	26	19		450	6500
XBF900604L	6	04	1/4"	3/8"-19	L	29	57	28	22		450	6500
XBF900605L	8	05	5/16"	3/8"-19	L	29	57	28	22		350	5000
XBF900606L	10	06	3/8"	3/8"-19	L	30	61	29	22		450	6500
XBF900806L	10	06	3/8"	1/2"-14	L	30	61	32	27		450	6500
XBF900808L	12	08	1/2"	1/2"-14	L	37	70	35	27		415	6000
XBF901008S	12	08	1/2"	5/8"-14	S	37	70	43	30		415	6000
XBF901010S	16	10	5/8"	5/8"-14	S	44	80	46	30		350	5000
XBF901210S	16	10	5/8"	3/4"-14	S	44	80	50	32		350	5000
XBF901212S	20	12	3/4"	3/4"-14	S	54	94	56	32		350	5000
XBF901612S	20	12	3/4"	1"-11	S	54	94	60	41		350	5000
XBF901616S	25	16	1"	1"-11	S	70	121	72	41		280	4000

BS 5200



L - Loose nut (Dado libero)

S - TIEFFE nut (Dado TIEFFE)

DKOR90


90° BSP SWEPT ELBOW - 60° CONE 90° GEBOGEN SLANGKOPPELING BSP - 60° CONUS MET ORING

TIEFFE Part.N.	Hose I.D. Ø interno tubo			Thread Filettatura F	Nut Dado	Dimensions (mm)					Maximum W.P.	
	DN	Size	Inch			H	L	K	S	O'Ring	bar	PSI
XBF900404OL	6	04	1/4"	1/4"-19	L	29	57	27	19	6,5x1	450	6500
XBF900604OL	6	04	1/4"	3/8"-19	L	29	57	29	22	8,5x1,5	450	6500
XBF900605OL	8	05	5/16"	3/8"-19	L	29	57	29	22	8,5x1,5	350	5000
XBF900606OL	10	06	3/8"	3/8"-19	L	30	61	30	22	8,5x1,5	450	6500
XBF900806OL	10	06	3/8"	1/2"-14	L	30	61	33	27	11,5x1,5	450	6500
XBF900808OL	12	08	1/2"	1/2"-14	L	37	70	36	27	11,5x1,5	415	6000
XBF901008OL	12	08	1/2"	5/8"-14	S	37	70	45	30	13x1,5	415	6000
XBF901010S	16	10	5/8"	5/8"-14	S	44	80	48	30	13x1,5	350	5000
XBF901210S	16	10	5/8"	3/4"-14	S	44	80	51	32	17x1,5	350	5000
XBF901212S	20	12	3/4"	3/4"-14	S	54	94	57	32	17x1,5	350	5000
XBF901612S	20	12	3/4"	1"-11	S	54	94	61	41	22x1,5	350	5000
XBF901616S	25	16	1"	1"-11	S	70	121	73	41	22x1,5	280	4000
XBF902016S	25	16	1"	1 1/4"-11	S	70	121	76	50	28,3x1,78	280	4000
XBF902020S	32	20	1 1/4"	1 1/4"-11	S	84	142	88	50	28,3x1,78	210	3000
XBF902420S	32	20	1 1/4"	1 1/2"-11	S	84	142	88	55	33,05x1,78	210	3000
XBF902424S	40	24	1 1/2"	1 1/2"-11	S	100	165	104	55	33,05x1,78	185	2700
XBF903224S	40	24	1 1/2"	2"-11	S	100	165	104	70	44,17x1,78	185	2700
XBF903232S	50	32	2"	2"-11	S	134	204	137	70	44,17x1,78	165	2400

BS 5200

DKR90
(COMPACT)

90° BSP COMPACT ELBOW - 60° CONE
SLANGKOPPELING BSP 90° KORT - 60° CONUS



TIEFFE
Part.N.

Hose I.D.
Ø interno tubo

Thread
Filettatura


Nut
Dado

Dimensions
(mm)

Maximum
W.P.


	DN	Size	Inch	F		H	L	K	S		bar	PSI
XBF90K0404	6	04	1/4"	1/4"-19	P	18	46	23	19		450	6500
XBF90K0604	8	05	5/16"	1/4"-19	P	21	49	26	22		450	6500
XBF90K0605	8	05	5/16"	3/8"-19	P	21	49	26	22		350	5000
XBF90K0606	10	06	3/8"	3/8"-19	P	21	52	26	22		450	6500
XBF90K0806	12	08	1/2"	1/2"-14	P	24	54	28	27		450	6500
XBF90K0808	12	08	1/2"	1/2"-14	P	24	57	28	27		415	6000
XBF90K1212	20	12	3/4"	3/4"-14	P	31	72	35	32		350	5000
XBF90K1616	25	16	1"	1"-11	P	38	89	41	41		280	4000

P - Pressed nut (Dado pressato)



B.S.P. BANJO BANJOKOPPELING BSP


TIEFFE Part.N.	Hose I.D. Ø interno tubo			Thread Filettatura	Dimensions (mm)					
	DN	Size	Inch		F	H	L	D	S	
XQB0203	5	03	3/16"	1/8"-28	20	45	10,2	10		
XQB0403	5	03	3/16"	1/4"-19	22,6	47,6	13,3	14		
XQB0204	6	04	1/4"	1/8"-28	23	51	10,2	10		
XQB0404	6	04	1/4"	1/4"-19	23	51	13,3	14		
XQB0604	6	04	1/4"	3/8"-19	26,5	54,5	16,8	17,5		
XQB0804	6	04	1/4"	1/2"-14	33,5	61,5	21	23		
XQB0405	8	05	5/16"	1/4"-19	24	52	13,3	14		
XQB0605	8	05	5/16"	3/8"-19	26,5	54,5	16,8	17,5		
XQB0805	8	05	5/16"	1/2"-14	33,5	61,5	21	23		
XQB0406	10	06	3/8"	1/4"-19	24	54,5	13,3	14		
XQB0606	10	06	3/8"	3/8"-19	24	54,5	16,8	17,5		
XQB0806	10	06	3/8"	1/2"-14	32	62,5	21	23		
XQB0608	12	08	1/2"	3/8"-19	26,5	59,5	16,8	17,5		
XQB0808	12	08	1/2"	1/2"-14	28,5	61,5	21	23		
XQB1008	12	08	1/2"	5/8"-14	31	64	23,1	23,5		
XQB1208	12	08	1/2"	3/4"-14	39	72	26,5	29,5		
XQB0810	16	10	5/8"	1/2"-14	27,2	63	21	23		
XQB1010	16	10	5/8"	5/8"-14	28,2	64	23,1	23,5		
XQB1210	16	10	5/8"	3/4"-14	34,7	70,5	26,5	29,5		
XQB1212	20	12	3/4"	3/4"-14	37,5	78	26,5	29,5		
XQB1612	20	12	3/4"	1"-11	39,5	90,5	33,5	37,5		
XQB1616	25	10	1	1"-11	49	100	33,5	37,5		




B.S.P. BANJO BOLT BANJOBOUT BSP

TIEFFE Part.N.		Thread Filettatura	Dimensions (mm)				
			F	L	L1	S	
QMB02		1/8"-28	26	21,5	14		
QMB04		1/4"-19	34,3	29,5	19		
QMB06		3/8"-19	40,5	34	22		
QMB08		1/2"-14	46	36	27		
QMB10		5/8"-14	55	45,5	30		
QMB12		3/4"-14	56	48	32		
QMB16		1"-11	69	59	41		

SAEJ516	AGN	NPTF MALE - 60° CONE SEAT MASCHIO NPTF - SVASATO 60°													
		TIEFFE Part. N.	Hose I.D. Ø interno tubo			Thread Filetto		Dimensions (mm)						Maximum WP	
			DN	Size	Inch	F		H	L	S				bar	PSI
		XNM0203	5	03	3/16"	1/8"-27		20,6	45,6	12				415	6000
		XNM0403	5	03	3/16"	1/4"-18		26,5	51,5	14				415	6000
		XNM0204	6	04	1/4"	1/8"-27		21,1	49,1	12				450	6500
		XNM0404	6	04	1/4"	1/4"-18		27	55	14				450	6500
		XNM0604	6	04	1/4"	3/8"-18		28,6	56,6	19				450	6500
		XNM0804	6	04	1/4"	1/2"-14		34	62	22				415	6000
		XNM0405	8	05	5/16"	1/4"-18		27	55	14				350	5000
		XNM0605	8	05	5/16"	3/8"-18		28,6	56,6	19				350	5000
		XNM0805	8	05	5/16"	1/2"-14		34	62	22				350	5000
		XNM0406	10	06	3/8"	1/4"-18		27,5	58	16				450	6500
		XNM0606	10	06	3/8"	3/8"-18		28,6	59,1	19				450	6500
		XNM0806	10	06	3/8"	1/2"-14		34	64,5	22				415	6000
		XNM0608	12	08	1/2"	3/8"-18		30,6	63,6	22				415	6000
		XNM0808	12	08	1/2"	1/2"-14		35	68	22				415	6000
		XNM1208	12	08	1/2"	3/4"-14		36,9	69,9	27				350	5000
		XNM0810	16	10	5/8"	1/2"-14		36,2	72	25				350	5000
		XNM1210	16	10	5/8"	3/4"-14		37,1	72,9	27				350	5000
		XNM0812	20	12	3/4"	1/2"-14		37,5	78	27				350	5000
		XNM1212	20	12	3/4"	3/4"-14		37,9	78,4	27				350	5000
		XNM1612	20	12	3/4"	1"-11,5		45,5	86	35				280	4000
		XNM1216	25	16	1"	3/4"-14		40,4	91,4	32				280	4000
		XNM1616	25	16	1"	1"-11,5		47	98	35				280	4000
		XNM2016	25	16	1"	1 1/4"-11,5		51,1	102,1	46				210	3000
		XNM2020	32	20	1 1/4"	1 1/4"-11,5		51,9	109,6	46				210	3000
		XNM2424	40	24	1 1/2"	1 1/2"-11,5		55	119,5	50				185	2700
		XNM3232	50	32	2"	2"-11,5		64	134	65				165	2400







AGJ

J.I.C. MALE - 74° CONE SLANGKOPPELING BU.DR. J.I.C. - CONUS 74°

TIEFFE Part. N.	Hose I.D. Ø interno tubo			Thread Filetto		Dimensions (mm)					Maximum WP bar
	DN	Size	Inch			H	L	S			
XJM0703	5	03	3/16"	7/16"-20		26,3	52	12			415
XJM0803	5	03	3/16"	1/2"-20		26,3	52	14			415
XJM0704	6	04	1/4"	7/16"-20		26,5	55	12			450
XJM0804	6	04	1/4"	1/2"-20		26,5	55	14			450
XJM0904	6	04	1/4"	9/16"-18		26,5	55	15			450
XJM0805	8	05	5/16"	1/2"-20		26,5	55	14			350
XJM0905	8	05	5/16"	9/16"-18		26,5	55	15			350
XJM1205	8	05	5/16"	3/4"-16		30,2	58,7	19			350
XJM0906	10	06	3/8"	9/16"-18		26,5	57	15			450
XJM1206	10	06	3/8"	3/4"-16		30,2	60,5	19			415
XJM1406	10	06	3/8"	7/8"-14		34,2	64,7	24			350
XJM1208	12	08	1/2"	3/4"-16		31	64	19			415
XJM1408	12	08	1/2"	7/8"-14		35,5	68	24			350
XJM1708	12	08	1/2"	1 1/16"-12		38,5	71,5	27			350
XJM1410	16	10	5/8"	7/8"-14		35	71	24			350
XJM1710	16	10	5/8"	1 1/16"-12		38,5	74,5	27			350
XJM1412	20	12	3/4"	7/8"-14		36	77	27			350
XJM1712	20	12	3/4"	1 1/16"-12		39,5	80,5	27			350
XJM1912	20	12	3/4"	1 3/16"-12		41,5	82,5	32			280
XJM2112	20	12	3/4"	1 5/16"-12		42	83	36			280
XJM1716	25	16	1"	1 1/16"-12		41	96	32			280
XJM2116	25	16	1"	1 5/16"-12		42,7	97,7	36			280
XJM2616	25	16	1"	1 5/8"-12		46	101	46			280
XJM2620	32	20	1 1/4"	1 5/8"-12		46,5	107,5	46			210
XJM3020	32	20	1 1/4"	1 7/8"-12		51	112	50			140
XJM3024	40	24	1 1/2"	1 7/8"-12		51,2	121,7	50			140
XJM4032	50	32	2"	2 1/2"-12		62,2	138,2	65			105




DKJ	J.I.C. FEMALE - 74° CONE SEAT - CRIMPED NUT SLANGKOPPELING WARTEL J.I.C. - CONUS ZITTING 74° - MOER GEPERST											
	TIEFFE Part. N.	Hose I.D. Ø interno tubo			Thread Filetto		Dimensions (mm)					Maximum WP
		DN	Size	Inch			H	L	S			
	XJF0703	5	03	3/16"	7/16"-20		14,5	40,2	15			350
	XJF0703SW14	5	03	3/16"	7/16"-20		14,5	40,2	14			350
	XJF0803	5	03	3/16"	1/2"-20		16,8	42,5	17			350
	XJF0704	6	04	1/4"	7/16"-20		14,7	43,2	15			350
	XJF0704SW14	6	04	1/4"	7/16"-20		14,7	43,2	14			350
	XJF0804	6	04	1/4"	1/2"-20		16	44,5	17			350
	XJF0904	6	04	1/4"	9/16"-18		18	46,5	19			250
	XJF0805	8	05	5/16"	1/2"-20		16	44,5	17			350
	XJF0905	8	05	5/16"	9/16"-18		17	45,5	19			250
	XJF1205	8	05	5/16"	3/4"-16		18,5	47	24			250
	XJF1205SW22	8	05	5/16"	3/4"-16		18,5	47	22			250
	XJF0906	10	06	3/8"	9/16"-18		17	47,5	19			250
	XJF1206	10	06	3/8"	3/4"-16		18,5	49	24			250
	XJF1206SW22	10	06	3/8"	3/4"-16		18,5	49	22			250
	XJF1406	10	06	3/8"	7/8"-14		19,5	50	27			200
	XJF1208	12	08	1/2"	3/4"-16		18,5	51,5	24			250
	XJF1208SW22	12	08	1/2"	3/4"-16		18,5	51,5	22			250
	XJF1408	12	08	1/2"	7/8"-14		19,5	52,5	27			200
	XJF1708	12	08	1/2"	1 1/16"-12		22,5	55,5	32			200
	XJF1410	16	10	5/8"	7/8"-14		19,5	55,5	27			200
	XJF1710	16	10	5/8"	1 1/16"-12		22,5	58,5	32			200
	XJF1412	20	12	3/4"	7/8"-14		20,5	61,5	27			200
	XJF1712	20	12	3/4"	1 1/16"-12		22	63	32			200
	XJF1912	20	12	3/4"	1 3/16"-12		25,2	66,2	36			160
	XJF2112	20	12	3/4"	1 5/16"-12		25,7	66,7	41			160
	XJF1716	25	16	1"	1 1/16"-12		23,5	78,5	32			200
	XJF2116	25	16	1"	1 5/16"-12		26	81	41			160
	XJF2616	25	16	1"	1 5/8"-12		28,8	83,8	50			125
	XJF2620	32	20	1 1/4"	1 5/8"-12		27,8	88,8	50			125
	XJF3020	32	20	1 1/4"	1 7/8"-12		31	92	55			100
	XJF3024	40	24	1 1/2"	1 7/8"-12		31,5	102	55			100
	XJF4032	50	32	2"	2 1/2"-12		33,5	109,5	70			80



DKJ	JIC STRAIGHT FEMALE - 74° CONE SEAT - DOUBLE EXAGON SLANGKOPPELING WARTEL JIC - CONUS 74° - DUBBELE EXAGON											
	TIEFFE Part. N.	Hose I.D. Ø interno tubo			Thread Filetto		Dimensions (mm)					Maximum WP
		DN	Size	Inch			H	L	S	S1		
	CP0404FIC	6	04	1/4"	7/16"-20		19	47,5	15	12		350
	CP0404FIC-EX14	6	04	1/4"	7/16"-20		19	47,5	14	12		350
	CP0405FIC	6	04	1/4"	1/2"-20		19	47,5	17	14		350
	CP0406FIC	6	04	1/4"	9/16"-18		23	51,5	19	14		250
	CP0506FIC	8	05	5/16"	9/16"-18		23	51,5	19	14		250
	CP0606FIC	10	06	3/8"	9/16"-18		23	53,4	19	15		250
	CP0608FIC	10	06	3/8"	3/4"-16		23,5	54	24	19		250
	CP0608FIC-EX22	10	06	3/8"	3/4"-16		23,5	54	22	19		250
	CP0808FIC	12	08	1/2"	3/4"-16		24,5	57,5	24	19		250
	CP0808FIC-EX22	12	08	1/2"	3/4"-16		24,5	57,5	22	19		250
	CP0810FIC	12	08	1/2"	7/8"-14		25,5	58,5	27	22		200
	CP1010FIC	16	10	5/8"	7/8"-14		25,5	61,5	27	22		200
	CP1012FIC	16	10	5/8"	1 1/16"-12		28	64	32	27		200
	CP1212FIC	20	12	3/4"	1 1/16"-12		29	70	32	27		200
	CP1616FIC	25	16	1"	1 5/16"-12		35	90	41	32		160

DKJ90


J.I.C. 90° SWEPT ELBOW - 74° CONE SEAT - ONE PIECE - CRIMPED NUT
SLANGKOPPELING 90° J.I.C. - CONUS 74° - UIT EEN STUK, MOER GEPERST




TIEFFE Part. N.	Hose I.D. Ø interno tubo			Thread Filetto	Dimensions (mm)						Maximum WP
	DN	Size	Inch	F	H	L	K	S			bar
XJF900703	5	03	3/16"	7/16"-20	21	47	22	15			350
XJF900703SW14	5	03	3/16"	7/16"-20	21	47	22	14			350
XJF900803	5	03	3/16"	1/2"-20	21	47	23	17			350
XJF900704	6	04	1/4"	7/16"-20	24	52	24	15			350
XJF900704SW14	6	04	1/4"	7/16"-20	24	52	24	14			350
XJF900804	6	04	1/4"	1/2"-20	24	52	25	17			350
XJF900904	6	04	1/4"	9/16"-18	23,5	52	27	19			250
XJF900805	8	05	5/16"	1/2"-20	31	59	29	17			350
XJF900905	8	05	5/16"	9/16"-18	30,5	59	30,5	19			250
XJF901205	8	05	5/16"	3/4"-16	30,5	59	33,5	24			250
XJF901205SW22	8	05	5/16"	3/4"-16	30,5	59	33,5	22			250
XJF900906	10	06	3/8"	9/16"-18	33,5	64	36,5	19			250
XJF901206	10	06	3/8"	3/4"-16	33,5	64	36	24			250
XJF901206SW22	10	06	3/8"	3/4"-16	33,5	64	36	22			250
XJF901406	10	06	3/8"	7/8"-14	33,5	64	38,5	27			200
XJF901208	12	08	1/2"	3/4"-16	41	74	40,5	24			250
XJF901208SW22	12	08	1/2"	3/4"-16	41	74	40,5	22			250
XJF901408	12	08	1/2"	7/8"-14	41	74	42	27			200
XJF901708	12	08	1/2"	1 1/16"-12	41	74	45,5	32			200
XJF901410	16	10	5/8"	7/8"-14	49	85	47	27			200
XJF901710	16	10	5/8"	1 1/16"-12	49	85	50,5	32			200
XJF901412	20	12	3/4"	7/8"-14	58	99	58	27			200
XJF901712	20	12	3/4"	1 1/16"-12	58	99	56,5	32			200
XJF901912	20	12	3/4"	1 3/16"-12	58	99	64	36			160
XJF902112	20	12	3/4"	1 5/16"-12	58	99	65	41			160
XJF901716	25	16	1"	1 1/16"-12	74	129	76	32			200
XJF902116	25	16	1"	1 5/16"-12	74	129	72	41			160
XJF902616	25	16	1"	1 5/8"-12	74	129	77	50			125
XJF902620	32	20	1 1/4"	1 5/8"-12	92	153	87	50			125
XJF903020	32	20	1 1/4"	1 7/8"-12	92	153	91	55			100
XJF903024	40	24	1 1/2"	1 7/8"-12	108	179	100	55			100
XJF904032	50	32	2"	2 1/2"-12	142	218	126	70			80


DKJ45


J.I.C. 45° SWEPT ELBOW - 74° CONE SEAT - ONE PIECE - CRIMPED NUT
SLANGKOPPELING 45° J.I.C. - CONUS 74° - UIT EEN STUK, MOER GEPERST





TIEFFE Part. N.	Hose I.D. Ø interno tubo			Thread Filetto	Dimensions (mm)						Maximum WP
	DN	Size	Inch	F	H	L	K	S			bar
XJF450703	5	03	3/16"	7/16"-20	34,5	60,5	13	15			350
XJF450703SW14	5	03	3/16"	7/16"-20	34,5	60,5	13	14			350
XJF450803	5	03	3/16"	1/2"-20	36	62	14,5	17			350
XJF450704	6	04	1/4"	7/16"-20	37	66	13,5	15			350
XJF450704SW14	6	04	1/4"	7/16"-20	37	66	13,5	14			350
XJF450804	6	04	1/4"	1/2"-20	38	67	14,5	17			350
XJF450904	6	04	1/4"	9/16"-18	39,5	68	15,5	19			250
XJF450805	8	05	5/16"	1/2"-20	46	74,5	16	17			350
XJF450905	8	05	5/16"	9/16"-18	47,5	76	17,5	19			250
XJF451205	8	05	5/16"	3/4"-16	49,5	77,5	19	24			250
XJF451205SW22	8	05	5/16"	3/4"-16	49,5	77,5	19	22			250
XJF450906	10	06	3/8"	9/16"-18	53,5	84	19,5	19			250
XJF451206	10	06	3/8"	3/4"-16	53,5	84	19,5	24			250
XJF451206SW22	10	06	3/8"	3/4"-16	53,5	84	19,5	22			250
XJF451406	10	06	3/8"	7/8"-14	55	85,5	21	27			200
XJF451208	12	08	1/2"	3/4"-16	61,5	94,5	22	24			200
XJF451208SW22	12	08	1/2"	3/4"-16	61,5	94,5	22	22			250
XJF451408	12	08	1/2"	7/8"-14	62,5	95,5	23	27			200
XJF451708	12	08	1/2"	1 1/16"-12	65	98	25,5	32			200
XJF451410	16	10	5/8"	7/8"-14	76	112	24	27			200
XJF451710	16	10	5/8"	1 1/16"-12	78,5	114,5	26	32			200
XJF451412	20	12	3/4"	7/8"-14	87	128	33,5	27			200
XJF451712	20	12	3/4"	1 1/16"-12	85,5	126,5	32	32			200
XJF451912	20	12	3/4"	1 3/16"-12	88,5	129,5	35	36			160
XJF452112	20	12	3/4"	1 5/16"-12	91	132	37,5	41			160
XJF451716	25	16	1"	1 1/16"-12	113	167,5	44,5	32			200
XJF452116	25	16	1"	1 5/16"-12	108	162,5	40	41			160
XJF452616	25	16	1"	1 5/8"-12	111	166	43	50			125
XJF452620	32	20	1 1/4"	1 5/8"-12	136	196,5	52	50			125
XJF453020	32	20	1 1/4"	1 7/8"-12	141	201,5	57	55			100
XJF453024	40	2 1/4	1 1/2"	1 7/8"-12	161	231	57	55			100
XJF454032	50	32	2"	2 1/2"-12	206	281	66,5	70			80

	AGJ	SAE MALE - 90° CONE SLANGKOPPELING BU.DR. SAE - CONUS 90°									
		Hose I.D. Ø interno tubo			Thread Filetto	Dimensions (mm)					
		DN	Size	Inch		H	L	S			
	TIEFFE Part. N.				F						
	XMS1005	8	05	5/16"	5/8"-18	28,2	56,7	17			
	XMS1006	10	06	3/8"	5/8"-18	28,2	58,7	17			
	XMS1712	20	12	3/4"	1 1/16"-14	40,5	81,5	27			

	DKJ	SAE FEMALE - 90° CONE SEAT - CRIMPED NUT SLANGKOPPELING SAE - CONUS 90° - UIT EEN STUK, MOER GEPERST									
		Hose I.D. Ø interno tubo			Thread Filetto	Dimensions (mm)					
		DN	Size	Inch		H	L	S			
	TIEFFE Part. N.				F						
	XFS1005	8	05	5/16"	5/8"-18	17,6	46,1	22			
	XFS1006	10	06	3/8"	5/8"-18	16,6	47,1	22			
	XFS1712	20	12	3/4"	1 1/16"-14	23,2	64,2	32			


	DKJ90	SAE 90° SWEPT ELBOW - 90° CONE SEAT - ONE PIECE - CRIMPED NUT SLANGKOPPELING 90° SAE - CONUS 90° - UIT EEN STUK, MOER GEPERST									
		Hose I.D. Ø interno tubo			Thread Filetto	Dimensions (mm)					
		DN	Size	Inch		H	L	K	S		
	TIEFFE Part. N.				F						
	XFS901005	8	05	5/16"	5/8"-18	31	59	30	22		
	XFS901006	10	06	3/8"	5/8"-18	34	64	33	22		
	XFS901712	20	12	3/4"	1 1/16"-14	58	99	56	32		

	DKJ45	SAE 45° SWEPT ELBOW - 90° CONE SEAT - ONE PIECE - CRIMPED NUT SLANGKOPPELING 45° SAE - CONUS 90° - UIT EEN STUK, MOER GEPERST									
		Hose I.D. Ø interno tubo			Thread Filetto	Dimensions (mm)					
		DN	Size	Inch		H	L	K	S		
	TIEFFE Part. N.				F						
	XFS451005	8	05	5/16"	5/8"-18	47	75	18	22		
	XFS451006	10	06	3/8"	5/8"-18	50	81	18	22		
	XFS451712	20	12	3/4"	1 1/16"-14	85	125	32	32		



SAE O' RING MALE BU.DR. SLANGKOPPELING SAE MET ORING


TIEFFE Part. N.	Hose I.D. Ø interno tubo			Thread Filetto F		Dimensions (mm)					Maximum WP bar
	DN	Size	Inch			H	L	S			
CP0404MS	6	04	1/4"	7/16"-20		23	51,5	14			350
CP0405MS	6	04	1/4"	1/2"-20		23	51,5	17			350
CP0406MS	6	04	1/4"	9/16"-18		24,5	53	17			250
CP0506MS	8	05	5/16"	9/16"-18		24,5	53	17			250
CP0606MS	10	06	3/8"	9/16"-18		24,5	55	17			250
CP0608MS	10	06	3/8"	3/4"-16		26,5	57	24			250
CP0808MS	12	08	1/2"	3/4"-16		27	60	24			250
CP0810MS	12	08	1/2"	7/8"-14		30	63	25			200
CP0812MS	12	08	1/2"	1 1/16"-12		34	67	32			200
CP1010MS	16	10	5/8"	7/8"-14		30	66	25			200
CP1012MS	16	10	5/8"	1 1/16"-12		34	70	32			200
CP1212MS	20	12	3/4"	1 1/16"-12		35	76	32			200
CP1216MS	20	12	3/4"	1 5/16"-12		36	77	38			160
CP1616MS	25	16	1"	1 5/16"-12		37	92	38			160



ORFS

ORFS MALE BU.DR. SLANGKOPPELING ORFS

TIEFFE Part. N.	Hose I.D. Ø interno tubo			Thread Filetto F		Dimensions (mm)					Maximum WP bar
	DN	Size	Inch			H	L	S			
XMU0904	6	04	1/4"	9/16"-18		23,5	52	17			450
XMU1104	6	04	1/4"	11/16"-16		26	54,5	19			450
XMU1105	8	05	5/16"	11/16"-16		26	54,5	19			350
XMU1106	10	06	3/8"	11/16"-16		26	56,5	19			445
XMU1306	10	06	3/8"	13/16"-16		28	58,5	22			445
XMU1606	10	06	3/8"	1"-14		32,5	63	27			445
XMU1308	12	08	1/2"	13/16"-16		29	62	22			415
XMU1608	12	08	1/2"	1"-14		33,5	66,5	27			415
XMU1908	12	08	1/2"	1 3/16"-12		35	68	32			415
XMU1610	16	10	5/8"	1"-14		33,5	69,5	27			350
XMU1910	16	10	5/8"	1 3/16"-12		35	71	32			350
XMU1912	20	12	3/4"	1 3/16"-12		36	77	32			350
XMU2312	20	12	3/4"	1 7/16"-12		36,5	77,5	41			350
XMU2316	25	16	1"	1 7/16"-12		38	93	41			280
XMU2720	32	20	1 1/4"	1 11/16"-12		40	101	46			210
XMU3224	40	24	1 1/2"	2"-12		43	113,5	55			185




ORFS

ORFS FEMALE - LOOSE NUT SLANGKOPPELING WARTEL ORFS - LOSSE MOER


TIEFFE Part. N.	Hose I.D. Ø interno tubo			Thread Filetto	F	Dimensions (mm)					Maximum WP bar
	DN	Size	Inch			H	L	S			
XFU0904	6	04	1/4"	9/16"-18		21	49,5	17			450
XFU1104	6	04	1/4"	11/16"-16		23	51,5	22			450
XFU1105	8	05	5/16"	11/16"-16		23	51,5	22			350
XFU1106	10	06	3/8"	11/16"-16		23	53,5	22			445
XFU1306	10	06	3/8"	13/16"-16		26	56,5	24			445
XFU1308	12	08	1/2"	13/16"-16		26,5	59,5	24			415
XFU1608	12	08	1/2"	1"-14		30	63	30			415
XFU1908	12	08	1/2"	1 3/16"-12		33	66	36			415
XFU1610	16	10	5/8"	1"-14		30	66	30			350
XFU1910	16	10	5/8"	1 3/16"-12		33	69	36			350
XFU1912	20	12	3/4"	1 3/16"-12		33,5	74,5	36			350
XFU2312	20	12	3/4"	1 7/16"-12		34,5	75,5	41			350
XFU2316	25	16	1"	1 7/16"-12		35,5	90,5	41			280
XFU2720	32	20	1 1/4"	1 11/16"-12		36	97	50			210
XFU3224	40	24	1 1/2"	2"-12		36,5	107	60			185

ORFS90

90° ORFS SWEPT ELBOW - ONE PIECE - LOOSE NUT SLANGKOPPELING 90° ORFS - EEN STUK - LOSSE MOER




TIEFFE Part. N.	Hose I.D. Ø interno tubo			Thread Filetto	F	Dimensions (mm)					Maximum WP bar
	DN	Size	Inch			H	L	K	S		
XFU900904	6	04	1/4"	9/16"-18		24	52	21	17		450
XFU901104	6	04	1/4"	11/16"-16		24	52	24	22		450
XFU901105	8	05	5/16"	11/16"-16		31	59	26,5	22		350
XFU901106	10	06	3/8"	11/16"-16		34	64	29,5	22		445
XFU901306	10	06	3/8"	13/16"-16		34	64	32,5	24		445
XFU901308	12	08	1/2"	13/16"-16		41	74	35,5	24		415
XFU901608	12	08	1/2"	1"-14		41	74	39	30		415
XFU901908	12	08	1/2"	1 3/16"-12		41	74	42	36		415
XFU901610	16	10	5/8"	1"-14		49	85	43,5	30		350
XFU901910	16	10	5/8"	1 3/16"-12		49	85	46,5	36		350
XFU901912	20	12	3/4"	1 3/16"-12		58	99	52	36		350
XFU902312	20	12	3/4"	1 7/16"-12		58	99	56	41		350
XFU902316	25	16	1"	1 7/16"-12		74	129	61,5	41		280
XFU902720	32	20	1 1/4"	1 11/16"-12		92	153	73,5	50		210
XFU903224	40	24	1 1/2"	2"-12		108	179	82,5	60		185



ORFS45

45° ORFS SWEPT ELBOW - ONE PIECE - LOOSE NUT SLANGKOPPELING 45° ORFS - EEN STUK - LOSSE MOER


TIEFFE Part. N.	Hose I.D. Ø interno tubo			Thread Filetto		Dimensions (mm)					Maximum WP bar
	DN	Size	Inch			H	L	K	S		
XFU450904	6	04	1/4"	9/16"-18		35,5	64	11,5	17		450
XFU451104	6	04	1/4"	11/16"-16		37	65,5	13	22		450
XFU451105	8	05	5/16"	11/16"-16		44,5	73	14	22		350
XFU451106	10	06	3/8"	11/16"-16		48,5	79	14,5	22		445
XFU451306	10	06	3/8"	13/16"-16		51	81,5	17	24		445
XFU451308	12	08	1/2"	13/16"-16		58	91	18,5	24		415
XFU451608	12	08	1/2"	1"-14		60	93	21	30		415
XFU451908	12	08	1/2"	1 3/16"-12		62,5	95,5	23	36		415
XFU451610	16	10	5/8"	1"-14		73,5	109,5	21	30		350
XFU451910	16	10	5/8"	1 3/16"-12		75,7	111,5	23,5	36		350
XFU451912	20	12	3/4"	1 3/16"-12		82,5	123,5	29	36		350
XFU452312	20	12	3/4"	1 7/16"-12		85,5	126,5	32	41		350
XFU452316	25	16	1"	1 7/16"-12		103	157,5	34,5	41		280
XFU452720	32	20	1 1/4"	1 11/16"-12		127	187,5	43	50		210
XFU453224	40	24	1 1/2"	2"-12		141	219,5	45	60		185




AGM

METRIC MALE - 60° CONE SEAT SLANGKOPPELING BU.DR. METRISCH - CONUS 60°


TIEFFE Part. N.	Hose I.D. Ø interno tubo			Thread Filetto	F	Dimensions (mm)					
	DN	Size	Inch			H	L	S			
XM61003	5	03	3/16"	M10x1		19	45	14			
XM61203	5	03	3/16"	M12x1,5		24	49	17			
XM61004	6	04	1/4"	M10x1		20	48	14			
XM61204	6	04	1/4"	M12x1,5		24	52	17			
XM61404	6	04	1/4"	M14x1,5		25	53	19			
XM61604	6	04	1/4"	M16x1,5		26	54	22			
XM61804	6	04	1/4"	M18x1,5		27	55	24			
XM61405	8	05	5/16"	M14x1,5		25	53	19			
XM61605	8	05	5/16"	M16x1,5		26	54	22			
XM61805	8	05	5/16"	M18x1,5		27	55	24			
XM61406	10	06	3/8"	M14x1,5		25	55	19			
XM61606	10	06	3/8"	M16x1,5		26	56	22			
XM61806	10	06	3/8"	M18x1,5		27	57	24			
XM62006	10	06	3/8"	M20x1,5		29	59	25			
XM62206	10	06	3/8"	M22x1,5		29	59	27			
XM61808	12	08	1/2"	M18x1,5		28	60	24			
XM62008	12	08	1/2"	M20x1,5		29	62	25			
XM62208	12	08	1/2"	M22x1,5		29	62	27			
XM62408	12	08	1/2"	M24x1,5		30	63	30			
XM62608	12	08	1/2"	M26x1,5		33	66	32			
XM62610	16	10	5/8"	M26x1,5		32	68	32			
XM62612	20	12	3/4"	M26x1,5		33	74	32			
XM63012	20	12	3/4"	M30x1,5		34	75	36			
XM63816	25	16	1"	M38x1,5		37	92	46			
XM64520	32	20	1 1/4"	M45x1,5		38	99	50			



DKM	METRIC FEMALE - 60° CONE - CRIMPED NUT SLANGKOPPELING METRISCH - CONUS 60° - GEPERSTE MOER										
	TIEFFE Part. N.	Hose I.D. Ø interno tubo			Thread Filetto F		Dimensions (mm)				
		DN	Size	Inch			H	L	S		
	XF61003	5	4,8	3/16"	M10x1		19	44	14		
	XF61203	5	4,8	3/16"	M12x1,5		19	44	15		
	XF61004	6	6,3	1/4"	M10X1		19	47	14		
	XF61204	6	6,3	1/4"	M12x1,5		19	47	15		
	XF61404	6	6,3	1/4"	M14x1,5		18	47	17		
	XF61604	6	6,3	1/4"	M16x1,5		20	49	22		
	XF61804	6	6,3	1/4"	M18x1,5		20	49	22		
	XF61405	8	7,9	5/16"	M14x1,5		18	47	17		
	XF61605	8	7,9	5/16"	M16x1,5		20	49	22		
	XF61805	8	7,9	5/16"	M18x1,5		20	49	22		
	XF61406	10	9,5	3/8"	M14x1,5		18	49	17		
	XF61606	10	9,5	3/8"	M16x1,5		20	51	22		
	XF61806	10	9,5	3/8"	M18x1,5		20	51	22		
	XF62006	10	9,5	3/8"	M20x1,5		22	53	27		
	XF62206	10	9,5	3/8"	M22x1,5		22	53	27		
	XF61808	12	12,7	1/2"	M18x1,5		21	54	22		
	XF62008	12	12,7	1/2"	M20x1,5		23	56	27		
	XF62208	12	12,7	1/2"	M22x1,5		23	56	27		
	XF62408	12	12,7	1/2"	M24x1,5		23	56	30		
	XF62608	12	12,7	1/2"	M26x1,5		25	58	32		
	XF62610	16	15,9	5/8"	M26x1,5		25	61	32		
	XF62612	20	19,1	3/4"	M26x1,5		26	67	32		
	XF63012	20	19,1	3/4"	M30x1,5		26	67	36		
	XF63816	25	25,4	1"	M38x1,5		30	85	46		
	XF64520	32	31,8	1 1/4"	M45x1,5		34	95	50		



DKM90	METRIC 90° SWEPT ELBOW - 60° CONE - ONE PIECE - CRIMPED NUT SLANGKOPPELING 90° METRISCH - CONUS 60° - 1 STUK - GEPERSTE MOER										
	TIEFFE Part. N.	Hose I.D. Ø interno tubo			Thread Filetto F		Dimensions (mm)				
		DN	Size	Inch			H	L	K	S	
	XF6901003	5	4,8	3/16"	M10x1		21	47	25	14	
	XF6901203	5	4,8	3/16"	M12x1,5		21	47	28	15	
	XF6901004	6	6,3	1/4"	M10X1		24	52	16	14	
	XF6901204	6	6,3	1/4"	M12x1,5		24	52	28	15	
	XF6901404	6	6,3	1/4"	M14x1,5		24	52	28	17	
	XF6901604	6	6,3	1/4"	M16x1,5		24	52	31	22	
	XF6901804	6	6,3	1/4"	M18x1,5		24	52	31	22	
	XF6901405	8	7,9	5/16"	M14x1,5		31	59	31,5	17	
	XF6901605	8	7,9	5/16"	M16x1,5		31	59	33,5	22	
	XF6901805	8	7,9	5/16"	M18x1,5		31	59	33,5	22	
	XF6901406	10	9,5	3/8"	M14x1,5		34	64	35,5	17	
	XF6901606	10	9,5	3/8"	M16x1,5		34	64	40,5	22	
	XF6901806	10	9,5	3/8"	M18x1,5		34	64	40,5	22	
	XF6902006	10	9,5	3/8"	M20x1,5		34	64	40,5	27	
	XF6902206	10	9,5	3/8"	M22x1,5		34	64	40,5	27	
	XF6901808	12	12,7	1/2"	M18x1,5		41	74	42	22	
	XF6902008	12	12,7	1/2"	M20x1,5		41	74	44	27	
	XF6902208	12	12,7	1/2"	M22x1,5		41	74	44	27	
	XF6902408	12	12,7	1/2"	M24x1,5		41	74	45,5	30	
	XF6902608	12	12,7	1/2"	M26x1,5		41	74	49,5	32	
	XF6902610	16	15,9	5/8"	M26x1,5		49	85	54,5	32	
	XF6902612	20	19,1	3/4"	M26x1,5		58	99	60,5	32	
	XF6903012	20	19,1	3/4"	M30x1,5		58	99	65	36	
	XF6903816	25	25,4	1"	M38x1,5		74	129	79	46	
	XF6904520	32	31,8	1 1/4"	M45x1,5		92	179	89	50	



DKM45


METRIC 45° SWEEP ELBOW - 60° CONE - ONE PIECE - CRIMPED NUT
SLANGKOPPELING 45° METRISCH - CONUS 60° - 1 STUK - MOER GEPERST

TIEFFE Part. N.	Hose I.D. Ø interno tubo			Thread Filetto		Dimensions (mm)						Maximum WP bar
	DN	Size	Inch			H	L	K	S			
XF6451003	5	4,8	3/16"	M10x1		36	61,5	14	14			
XF6451203	5	4,8	3/16"	M12x1,5		37,5	63	15,5	15			
XF6451004	6	6,3	1/4"	M10x1		39	67,5	15	14			
XF6451204	6	6,3	1/4"	M12x1,5		40	68,5	16,5	15			
XF6451404	6	6,3	1/4"	M14x1,5		40	68,5	16,5	17			
XF6451604	6	6,3	1/4"	M16x1,5		42,5	71	18,5	22			
XF6451804	6	6,3	1/4"	M18x1,5		42,5	71	18,5	22			
XF6451405	8	7,9	5/16"	M14x1,5		48	76,5	18	17			
XF6451605	8	7,9	5/16"	M16x1,5		49,5	78	19,5	22			
XF6451805	8	7,9	5/16"	M18x1,5		49,5	78	19,5	22			
XF6451406	10	9,5	3/8"	M14x1,5		53	83,5	19	17			
XF6451606	10	9,5	3/8"	M16x1,5		53,5	84	19,5	22			
XF6451806	10	9,5	3/8"	M18x1,5		53,5	84	19,5	22			
XF6452006	10	9,5	3/8"	M20x1,5		56,5	87	22,5	27			
XF6452206	10	9,5	3/8"	M22x1,5		56,5	87	22,5	27			
XF6451808	12	12,7	1/2"	M18x1,5		62,5	95,5	23	22			
XF6452008	12	12,7	1/2"	M20x1,5		64	97	24,5	27			
XF6452208	12	12,7	1/2"	M22x1,5		64	97	24,5	27			
XF6452408	12	12,7	1/2"	M24x1,5		65	98	25,5	30			
XF6452608	12	12,7	1/2"	M26x1,5		67,5	101	28	32			
XF6452610	16	15,9	5/8"	M26x1,5		81	117	29	32			
XF6452612	20	19,1	3/4"	M26x1,5		88,5	130	35	32			
XF6453012	20	19,1	3/4"	M30x1,5		91	132	38,5	36			
XF6453816	25	25,4	1"	M38x1,5		114	169	46	46			
XF6454520	32	31,8	1 1/4"	M45x1,5		138	199	54	50			

DIN 20078/3868

DKL

METRIC FEMALE - MULTISEAL METRISCH WARTEL - MULISEAL




TIEFFE Part.N.	Hose I.D. Ø interno tubo			Thread Filettatura	Tube	Dimensions (mm)					Maximum W.P.	
	DN	Size	Inch	F	mm	H	L	S			bar	PSI
XFE140804	6	04	1/4"	M14x1,5	8	20	48	17			280	4000
XFE161004	8	05	5/16"	M16x1,5	10	20	48	19			280	4000
XFE181206	10	06	3/8"	M18x1,5	12	20	50	22			280	4000
XFE221508	12	08	1/2"	M22x1,5	15	21	54	27			280	4000
XFE261810	16	10	5/8"	M26x1,5	18	23	58	32			210	3000

DIN 20078/3868

DKL45

45° METRIC SWEPT ELBOW - MULTISEAL SLANGKOPPELING BOCHT 45° METRISCH - MULTISEAL




TIEFFE Part.N.	Hose I.D. Ø interno tubo			Thread Filettatura	Tube	Dimensions (mm)					Maximum W.P.	
	DN	Size	Inch	F	mm	H	L	K	S		bar	PSI
XFE45140804	6	04	1/4"	M14x1,5	8	35	63	13	17		280	4000
XFE45161005	8	05	5/16"	M16x1,5	10	37	65	15	19		280	4000
XFE45181206	10	06	3/8"	M18x1,5	12	39	69	15	22		280	4000
XFE45221508	12	08	1/2"	M22x1,5	15	45	78	17	27		280	4000
XFE45261810	16	10	5/8"	M26x1,5	18	52	87	20	32		210	3000

DIN 20078/3868


DKL90

90° METRIC SWEPT ELBOW - MULTISEAL SLANGKOPPELING 90° METRISCH - MULTISEAL




TIEFFE Part.N.	Hose I.D. Ø interno tubo			Thread Filettatura	Tube	Dimensions (mm)					Maximum W.P.	
	DN	Size	Inch	F	mm	H	L	K	S		bar	PSI
XFE90140804	6	04	1/4"	M14x1,5	8	29	57	27	17		280	4000
XFE90161005	8	05	5/16"	M16x1,5	10	31	59	30	19		280	4000
XFE90181206	10	06	3/8"	M18x1,5	12	31	61	30	22		280	4000
XFE90221508	12	08	1/2"	M22x1,5	15	37	70	36	27		280	4000
XFE90261810	16	10	5/8"	M26x1,5	18	45	81	42	32		210	3000

METRIC BANJO - ONEPIECE METRISCHE BANJO - UIT 1 DEEL



TIEFFE Part.N.	Hose I.D. Ø interno tubo			Thread Filettatura	Dimensions (mm)					
	DN	Size	Inch		F	H	L	D	S	
XQB0203	5	03	3/16"	M10x1	20	45	10,2	10		
XQE1203	5	03	3/16"	M12x1,5	21,1	46,1	12,1	12		
XQE1403	5	03	3/16"	M14x1,5	22,6	47,6	14,2	14		
XQB0204	6	04	1/4"	M10x1	23	51	10,2	10		
XQE1204	6	04	1/4"	M12x1,5	23	51	12,1	12		
XQE1404	6	04	1/4"	M14x1,5	23	51	14	14		
XQE1604	6	04	1/4"	M16x1,5	26,5	54,5	16,2	17,5		
XQE1804	6	04	1/4"	M18x1,5	28,5	56,5	18,2	20,5		
XQE1205	8	05	5/16"	M12x1,5	23,5	51,5	12,1	12		
XQE1405	8	05	5/16"	M14x1,5	24	52	14,2	14		
XQE1605	8	05	5/16"	M16x1,5	26,5	54,5	16,2	17,5		
XQE1805	8	05	5/16"	M18x1,5	28,5	56,5	18,2	20,5		
XQE1406	10	06	3/8"	M14x1,5	24	54,5	14,2	14		
XQE1606	10	06	3/8"	M16x1,5	24	54,5	16,2	17,5		
XQE1806	10	06	3/8"	M18x1,5	27	57,5	18,2	20,5		
XQE2006	10	06	3/8"	M20x1,5	32	62,5	20,2	23		
XQE2206	10	06	3/8"	M22x1,5	32	62,5	22,2	22,5		
XQB1208	12	08	1/2"	M26x1,5	39	72	26,5	29,5		
XQE1808	12	08	1/2"	M18x1,5	28,1	61,1	18,2	20,5		
XQE2008	12	08	1/2"	M20x1,5	28,5	61,5	20,2	23		
XQE2208	12	08	1/2"	M22x1,5	28,5	61,5	22,2	22,5		
XQB1210	16	10	5/8"	M26x1,5	34,7	70,5	26,5	29,5		
XQE2210	16	10	5/8"	M22x1,5	27,2	63	22,2	22,5		
XQB1212	20	12	3/4"	M26x1,5	37,5	78	26,5	29,5		
XQE3012	20	12	3/4"	M30x1,5	41,5	82	30,2	30		
XQE3016	25	16	1"	M30x1,5	43	94	30,2	37		

METRIC BANJO BOLT METRISCHE BANJO BOUT




TIEFFE Part.N.		Thread Filettatura	Dimensions (mm)				
			F	L	L1	S	
QME10		M10x1	26	21,5	14		
QME12		M12x1,5	31	25,5	17		
QME14		M14x1,5	37,5	30,5	19		
QME16		M16x1,5	40	32,5	22		
QME18		M18x1,5	44	36,5	24		
QME20		M20x1,5	48	39,5	27		
QME22		M22x1,5	50	41,5	28		
QME26		M26x1,5	58	48,5	32		
QME30		M30x1,5	64	53	36		

ISO 12151-2
DIN 20078

CEL

METRIC MALE - 24° CONE SEAT - LIGHT DUTY
METRISCHE BU.DR. KOPPELING - 24° CONUS - LICHTE SERIE




TIEFFE Part.N.	Hose I.D. Ø interno tubo			Thread Filettatura	Tube	Dimensions (mm)					Maximum W.P.	
	DN	Size	Inch	F	mm	H	L	S			bar	PSI
XME120603	5	03	3/16"	M12x1,5	6	21	46	12			280	4000
XME140803	5	03	3/16"	M14x1,5	8	21	46	14			280	4000
XME120604	6	04	1/4"	M12x1,5	6	21	49	12			280	4000
XME140804	6	04	1/4"	M14x1,5	8	21	49	14			280	4000
XME161004	6	04	1/4"	M16x1,5	10	23	51	17			280	4000
XME181204	6	04	1/4"	M18x1,5	12	23	51	19			280	4000
XME161005	8	05	5/16"	M16x1,5	10	23	51	17			280	4000
XME181205	8	05	5/16"	M18x1,5	12	23	51	19			280	4000
XME161006	10	06	3/8"	M16x1,5	10	23	53	17			280	4000
XME181206	10	06	3/8"	M18x1,5	12	23	53	19			280	4000
XME221506	10	06	3/8"	M22x1,5	15	25	56	22			280	4000
XME221508	12	08	1/2"	M22x1,5	15	26	59	22			280	4000
XME261808	12	08	1/2"	M26x1,5	18	28	61	27			210	3000
XME261810	16	10	5/8"	M26x1,5	18	28	64	27			210	3000
XME302210	16	10	5/8"	M30x2	22	30	66	30			210	3000
XME261812	20	12	3/4"	M26x1,5	18	29	70	27			210	3000
XME302212	20	12	3/4"	M30x2	22	31	72	30			210	3000
XME362816	25	16	1"	M36x2	28	35	86	36			165	2350
XME453520	32	20	1 1/4"	M45x2	35	40	97	46			125	1800
XME524224	40	24	1 1/2"	M52x2	42	42	106	55			100	1450

ISO 12151-2
DIN 20078

CES

METRIC MALE - 24° CONE SEAT - HEAVY DUTY
METRISCHE BU.DR. KOPPELING - 24° CONUS - ZWARE SERIE




TIEFFE Part.N.	Hose I.D. Ø interno tubo			Thread Filettatura	Tube	Dimensions (mm)					Maximum W.P.	
	DN	Size	Inch	F	mm	H	L	S			bar	PSI
XME140603	5	03	3/16"	M14x1,5	6	23	48	14			420	6000
XME160803	5	03	3/16"	M16x1,5	8	23	48	17			420	6000
XME140604	6	04	1/4"	M14x1,5	6	23	51	14			450	6500
XME160804	6	04	1/4"	M16x1,5	8	23	51	17			450	6500
XME181004	6	04	1/4"	M18x1,5	10	24	52	19			450	6500
XME201204	6	04	1/4"	M20x1,5	12	25	53	22			450	6500
XME181005	8	05	5/16"	M18x1,5	10	24	52	19			350	5000
XME201205	8	05	5/16"	M20x1,5	12	25	53	22			350	5000
XME181006	10	06	3/8"	M18x1,5	10	24	55	19			450	6500
XME201206	10	06	3/8"	M20x1,5	12	25	56	22			450	6500
XME221406	10	06	3/8"	M22x1,5	14	27	58	22			450	6500
XME221408	12	08	1/2"	M22x1,5	14	28	61	22			420	6000
XME241608	12	08	1/2"	M24x1,5	16	29	62	24			420	6000
XME302010	16	10	5/8"	M30x2	20	32	68	30			350	5000
XME302012	20	12	3/4"	M30x2	20	33	74	30			350	5000
XME362512	20	12	3/4"	M36x2	25	37	78	36			350	5000
XME362516	25	16	1"	M36x2	25	39	90	36			280	4000
XME423016	25	16	1"	M42x2	30	43	94	46			280	4000
XME423020	32	20	1 1/4"	M42x2	30	44	101	46			210	3000
XME523820	32	20	1 1/4"	M52x2	38	48	105	55			210	3000
XME523824	40	24	1 1/2"	M52x2	38	48	112	55			185	2600

ISO 12151-2
DIN 20078

DKOL

METRIC FEMALE - 24° O-RING CONE - LIGHT DUTY
METRISCHE WARTELKOPPELING - CONUS 24° O-RING - LICHTE SERIE



* Swaged nut


** Tieffe nut

TIEFFE Part.N.	Hose I.D. Ø interno tubo			Thread Filettatura	Tube	Dimensions (mm)					Maximum W.P.	
	DN	Size	Inch	F	mm	H	L	S	O'Ring	bar	PSI	
XFEO120603	5	03	3/16"	M12x1,5	6	21	46	14	5x1	280	4000	
XFEO140803	5	03	3/16"	M14x1,5	8	21	46	17	6x1,5	280	4000	
XFEO120604	6	04	1/4"	M12x1,5	6	23	51	17	5x1	280	4000	
XFEO140804	6	04	1/4"	M14x1,5	8	22	50	17	6x1,5	280	4000	
XFEO161004	6	04	1/4"	M16x1,5	10	24	52	19	7,5x1,5	280	4000	
XFEO181204	6	04	1/4"	M18x1,5	12	24	52	22	9x1,5	280	4000	
XFEO161005	8	05	5/16"	M16x1,5	10	24	52	19	7,5x1,5	280	4000	
XFEO181205	8	05	5/16"	M18x1,5	12	24	52	22	9x1,5	280	4000	
XFEO161006	10	06	3/8"	M16x1,5	10	23	54	19	7,5x1,5	280	4000	
XFEO181206	10	06	3/8"	M18x1,5	12	24	54	22	9x1,5	280	4000	
XFEO221506	10	06	3/8"	M22x1,5	15	24	54	27	12x2	280	4000	
XFEO221508	12	08	1/2"	M22x1,5	15	24	57	27	12x2	280	4000	
XFEO261808	12	08	1/2"	M26x1,5	18	26	59	32	15x2	210	3000	
XFEO261810	16	10	5/8"	M26x1,5	18	27	62	32	15x2	210	3000	
XFEO302210	16	10	5/8"	M30x2	22	28	64	36	20x2	210	3000	
XFEO261812	20	12	3/4"	M26x1,5	18	34	75	32	15x2	210	3000	
XFEO302212	20	12	3/4"	M30x2	22	31	71	36	20x2	210	3000	
XFEO362816	25	16	1"	M36x2	28	32	83	41	26x2	165	2350	
XFEO453520	32	20	1 1/4"	M45x2	35	36	94	50	32x2,5	125	1800	
XFEO524224	40	24	1 1/2"	M52x2	42	37	102	60	38x2,5	100	1450	

ISO 12151-2
DIN 20078

DKOS

METRIC FEMALE - 24° O-RING CONE - HEAVY DUTY
METRISCHE WARTELKOPPELING - CONUS 24° O-RING - ZWARE SERIE




* Swaged nut

TIEFFE Part.N.	Hose I.D. Ø interno tubo			Thread Filettatura	Tube	Dimensions (mm)					Maximum W.P.	
	DN	Size	Inch	F	mm	H	L	S		O'Ring	bar	PSI
XFEO140603	5	03	3/16"	M14x1,5	6	21	46	17		5x1	420	6000
XFEO160803	5	03	3/16"	M16x1,5	8	21	46	19		6x1,5	420	6000
XFEO140604	6	04	1/4"	M14x1,5	6	23	51	17		5x1	450	6500
XFEO160804	6	04	1/4"	M16x1,5	8	22	50	19		6x1,5	450	6500
XFEO181004	6	04	1/4"	M18x1,5	10	24	52	22		7,5x1,5	450	6500
XFEO201204	6	04	1/4"	M20x1,5	12	24	52	24		9x1,5	450	6500
XFEO181005	8	05	5/16"	M18x1,5	10	24	52	22		7,5x1,5	350	5000
XFEO201205	8	05	5/16"	M20x1,5	12	24	52	24		9x1,5	350	5000
XFEO181006	10	06	3/8"	M18x1,5	10	25	55	22		7,5x1,5	450	6500
XFEO201206	10	06	3/8"	M20x1,5	12	24	54	24		9x1,5	450	6500
XFEO221406	10	06	3/8"	M22x1,5	14	28	58	27		10x2	450	6500
XFEO221408	12	08	1/2"	M22x1,5	14	28	61	27		10x2	420	6000
XFEO241608	12	08	1/2"	M24x1,5	16	29	62	30		12x2	420	6000
XFEO302010	16	10	5/8"	M30x2	20	33	69	36		16,3x2,4	350	5000
XFEO302012	20	12	3/4"	M30x2	20	36	76	36		16,3x2,4	350	5000
XFEO362512	20	12	3/4"	M36x2	25	38	78	46		20,3x2,4	350	5000
XFEO362512SW41	20	12	3/4"	M36x2	25	38	78	41		20,3x2,4	350	5000
XFEO362516	25	16	1"	M36x2	25	40	91	46		22x2	280	4000
XFEO423016	25	16	1"	M42x2	30	40	91	50		25,3x2,4	280	4000
XFEO423020	32	20	1 1/4"	M42x2	30	41	99	50		25,3x2,4	210	3000
XFEO523820	32	20	1 1/4"	M52x2	38	45	103	60		33,3x2,4	210	3000
XFEO523824	40	24	1 1/2"	M52x2	38	46	110	60		33,3x2,4	185	2600

ISO 12151-2
DIN 20078

DKOL45

45° METRIC SWEPT ELBOW - 24° O-RING CONE - LIGHT DUTY
METRISCHE BOCHT 45° - 24° CONUS MET ORING - LICHTE SERIE



* Swaged nut


** Tieffe nut

TIEFFE Part.N.	Hose I.D. Ø interno tubo			Thread Filettatura	Tube	Dimensions (mm)					Maximum W.P.	
	DN	Size	Inch	F	mm	H	L	K	S	O'Ring	bar	PSI
XFEO45120603	5	03	3/16"	M12x1,5	6	34	59	14	14	5x1	280	4000
XFEO45140803	5	03	3/16"	M14x1,5	8	35	60	14	17	6x1,5	280	4000
XFEO45120604	6	04	1/4"	M12x1,5	6	35	63	14	17	5x1	280	4000
XFEO45140804	6	04	1/4"	M14x1,5	8	36	64	14	17	6x1,5	280	4000
XFEO45161004	6	04	1/4"	M16x1,5	10	38	66	16	19	7,5x1,5	280	4000
XFEO45181204	6	04	1/4"	M18x1,5	12	39	67	17	22	9x1,5	280	4000
XFEO45161005	8	05	5/16"	M16x1,5	10	39	67	17	19	7,5x1,5	280	4000
XFEO45181205	8	05	5/16"	M18x1,5	12	39	67	18	22	9x1,5	280	4000
XFEO45161005	10	06	3/8"	M16x1,5	10	39	69	16	19	7,5x1,5	280	4000
XFEO45181206	10	06	3/8"	M18x1,5	12	40	71	18	22	9x1,5	280	4000
XFEO45221506	10	06	3/8"	M22x1,5	15	42	72	19	27	12x2	280	4000
XFEO45221508	12	08	1/2"	M22x1,5	15	46	79	19	27	12x2	280	4000
XFEO45261808	12	08	1/2"	M26x1,5	18	47	80	21	32	15x2	210	3000
XFEO45261810	16	10	5/8"	M26x1,5	18	53	89	22	32	15x2	210	3000
XFEO45302210	16	10	5/8"	M30x2	22	54	90	23	36	20x2	210	3000
XFEO45261812	20	12	3/4"	M26x1,5	18	66	107	29	32	15x2	210	3000
XFEO45302212	20	12	3/4"	M30x2	22	62	103	25	36	20x2	210	3000
XFEO45362816	25	16	1"	M36x2	28	80	131	31	41	26x2	165	2350
XFEO45453520	32	20	1 1/4"	M45x2	35	96	154	40	50	32x2,5	125	1800
XFEO45524224	40	24	1 1/2"	M52x2	42	115	179	48	60	38x2,5	100	1450

ISO 12151-2
DIN 20078

DKOS45

45° METRIC SWEPT ELBOW - 24° O-RING CONE - HEAVY DUTY
METRISCHE BOCHT 45° - 24° CONUS MET ORING - ZWARE SERIE




* Swaged nut

TIEFFE Part.N.	Hose I.D. Ø interno tubo			Thread Filettatura	Tube	Dimensions (mm)					Maximum W.P.	
	DN	Size	Inch	F	mm	H	L	K	S	O'Ring	bar	PSI
XFEO45140603	5	03	3/16"	M14x1,5	6	34	59	14	17	5x1	420	6000
XFEO45160803	5	03	3/16"	M16x1,5	8	35	60	14	19	6x1,5	420	6000
XFEO45140604	6	04	1/4"	M14x1,5	6	35	63	14	17	5x1	450	6500
XFEO45160804	6	04	1/4"	M16x1,5	8	36	64	14	19	6x1,5	450	6500
XFEO45181004	6	04	1/4"	M18x1,5	10	38	66	16	22	7,5x1,5	450	6500
XFEO45201204	6	04	1/4"	M20x1,5	12	39	67	17	24	9x1,5	450	6500
XFEO45181005	8	05	5/16"	M18x1,5	10	39	67	17	22	7,5x1,5	350	5000
XFEO45201205	8	05	5/16"	M20x1,5	12	39	67	18	24	9x1,5	350	5000
XFEO45181006	10	06	3/8"	M18x1,5	10	40	70	17	22	7,5x1,5	450	6500
XFEO45201206	10	06	3/8"	M20x1,5	12	40	71	18	24	9x1,5	450	6500
XFEO45221406	10	06	3/8"	M22x1,5	14	42	72	19	27	10x2	450	6500
XFEO45221408	12	08	1/2"	M22x1,5	14	46	79	20	27	10x2	420	6000
XFEO45241608	12	08	1/2"	M24x1,5	16	47	80	21	30	12x2	420	6000
XFEO45302010	16	10	5/8"	M30x2	20	56	92	25	36	16,3x2,4	350	5000
XFEO45302012	20	12	3/4"	M30x2	20	64	105	27	36	16,3x2,4	350	5000
XFEO45362512	20	12	3/4"	M36x2	25	64	105	28	46	20,3x2,4	350	5000
XFEO45362512SW41	20	12	3/4"	M36x2	25	64	105	28	41	20,3x2,4	350	5000
XFEO45362516	25	16	1"	M36x2	25	82	133	34	41	22x2	280	4000
XFEO45423016	25	16	1"	M42x2	30	80	131	31	50	25,3x2,4	280	4000
XFEO45423020	32	20	1 1/4"	M42x2	30	96	154	41	50	25,3x2,4	210	3000
XFEO45523820	32	20	1 1/4"	M52x2	38	94	152	38	60	33,3x2,4	210	3000
XFEO45523824	40	24	1 1/2"	M52x2	38	115	180	49	60	33,3x2,4	185	2600

ISO 12151-2
DIN 20078

DKOL90

90° METRIC SWEPT ELBOW - 24° O-RING CONE - LIGHT DUTY
METRISCHE BOCHT 90° - 24° CONUS MET ORING - LICHTE SERIE



* Swaged nut


** Tieffe nut

TIEFFE Part.N.	Hose I.D. Ø interno tubo			Thread Filettatura	Tube	Dimensions (mm)					Maximum W.P.	
	DN	Size	Inch	F	mm	H	L	K	S	O'Ring	bar	PSI
XFE090120603	5	03	3/16"	M12x1,5	6	27	52	28	14	5x1	280	4000
XFE090140803	5	03	3/16"	M14x1,5	8	27	52	28	17	6x1,5	280	4000
XFE090120604	6	04	1/4"	M12x1,5	6	26	53	26	17	5x1	280	4000
XFE090140804	6	04	1/4"	M14x1,5	8	29	57	29	17	6x1,5	280	4000
XFE090161004	6	04	1/4"	M16x1,5	10	29	57	30	19	7,5x1,5	280	4000
XFE090181204	6	04	1/4"	M18x1,5	12	29	57	32	22	9x1,5	280	4000
XFE090161005	8	05	5/16"	M16x1,5	10	31	59	33	19	7,5x1,5	280	4000
XFE090181205	8	05	5/16"	M18x1,5	12	28	56	32	22	9x1,5	280	4000
XFE090161006	10	06	3/8"	M16x1,5	10	31	61	31	19	7,5x1,5	280	4000
XFE090181206	10	06	3/8"	M18x1,5	12	31	61	33	22	9x1,5	280	4000
XFE090221506	10	06	3/8"	M22x1,5	15	31	61	35	27	12x2	280	4000
XFE090221508	12	08	1/2"	M22x1,5	15	37	70	38	27	12x2	280	4000
XFE090261808	12	08	1/2"	M26x1,5	18	37	70	40	32	15x2	210	3000
XFE090261810	16	10	5/8"	M26x1,5	18	44	80	45	32	15x2	210	3000
XFE090302210	16	10	5/8"	M30x2	22	44	80	47	36	20x2	210	3000
XFE090261812	20	12	3/4"	M26x1,5	18	54	94	57	32	15x2	210	3000
XFE090302212	20	12	3/4"	M30x2	22	54	94	52	36	20x2	210	3000
XFE090362816	25	16	1"	M36x2	28	70	121	66	41	26x2	165	2350
XFE090453520	32	20	1 1/4"	M45x2	35	84	141	83	50	32x2,5	125	1800
XFE090524224	40	24	1 1/2"	M52x2	42	100	164	100	60	38x2,5	100	1450

ISO 12151-2
DIN 20078


DKOS90

90° METRIC SWEPT ELBOW - 24° O-RING CONE - HEAVY DUTY
METRISCHE BOCHT 90° - 24° CONUS MET ORING - ZWARE SERIE





* Swaged nut


TIEFFE Part.N.	Hose I.D. Ø interno tubo			Thread Filettatura	Tube	Dimensions (mm)					Maximum W.P.	
	DN	Size	Inch	F	mm	H	L	K	S	O'Ring	bar	PSI
XFE090140603	5	03	3/16"	M14x1,5	6	27	52	28	17	5x1	420	6000
XFE090160803	5	03	3/16"	M16x1,5	8	27	52	28	19	6x1,5	420	6000
XFE090140604	6	04	1/4"	M14x1,5	6	25	53	26	17	5x1	450	6500
XFE090160804	6	04	1/4"	M16x1,5	8	29	57	29	19	6x1,5	450	6500
XFE090181004	6	04	1/4"	M18x1,5	10	29	57	30	22	7,5x1,5	450	6500
XFE090201204	6	04	1/4"	M20x1,5	12	29	57	32	24	9x1,5	450	6500
XFE090181005	8	05	5/16"	M18x1,5	10	31	59	33	22	7,5x1,5	350	5000
XFE090201205	8	05	5/16"	M20x1,5	12	28	56	32	24	9x1,5	350	5000
XFE090181006	10	06	3/8"	M18x1,5	10	30	61	33	22	7,5x1,5	450	6500
XFE090201206	10	06	3/8"	M20x1,5	12	31	61	33	24	9x1,5	450	6500
XFE090221406	10	06	3/8"	M22x1,5	14	34	64	37	27	10x2	450	6500
XFE090221408	12	08	1/2"	M22x1,5	14	39	71	41	27	10x2	420	6000
XFE090241608	12	08	1/2"	M24x1,5	16	39	71	42	30	12x2	420	6000
XFE090302010	16	10	5/8"	M30x2	20	44	80	49	36	16,3x2,4	350	5000
XFE090302012	20	12	3/4"	M30x2	20	54	94	55	36	16,3x2,4	350	5000
XFE090362512	20	12	3/4"	M36x2	25	54	94	57	46	20,3x2,4	350	5000
XFE090362512SW41	20	12	3/4"	M36x2	25	54	94	57	41	20,3x2,4	350	5000
XFE090362516	25	16	1"	M36x2	25	70	121	70	46	22x2	280	4000
XFE090423016	25	16	1"	M42x2	30	70	121	66	50	25,3x2,4	280	4000
XFE090423020	32	20	1 1/4"	M42x2	30	84	141	84	50	25,3x2,4	210	3000
XFE090523820	32	20	1 1/4"	M52x2	38	84	141	80	60	33,3x2,4	210	3000
XFE090523824	40	24	1 1/2"	M52x2	38	100	164	101	60	33,3x2,4	185	2600



BEL BES	METRIC STANDPIPE METRISCHE STANDPIJP											
TIEFFE Part. N.	Hose I.D. Ø interno tubo			E		Dimensions (mm)						Maximum WP
	DN	Size	Inch	mm		H	L	M				bar
XEZ0603	5	03	3/16"	6		29,5	55	23				415
XEZ0803	5	03	3/16"	8		29,5	55	23				415
XEZ0604	6	04	1/4"	6		27,5	56	21				320
XEZ0804	6	04	1/4"	8		29,5	58	23				450
XEZ1004	6	04	1/4"	10		31,5	60	25				450
XEZ1204	6	04	1/4"	12		32,5	61	25				450
XEZ1005	8	05	5/16"	10		31,5	60	25				350
XEZ1205	8	05	5/16"	12		31,5	59	25				350
XEZ1006	10	06	3/8"	10		28,5	59	22				330
XEZ1206	10	06	3/8"	12		31,5	62	25				445
XEZ1406	10	06	3/8"	14		34,5	65	28				445
XEZ1506	10	06	3/8"	15		30,5	61	24				250
XEZ1408	12	08	1/2"	14		35,5	68,5	28				275
XEZ1508	12	08	1/2"	15		31,5	64,5	24				250
XEZ1608	12	08	1/2"	16		36,5	69,5	29				415
XEZ1808	12	08	1/2"	18		33,5	66,5	26				160
XEZ1810	16	10	5/8"	18		33,5	69,5	26				160
XEZ2010	16	10	5/8"	20		42,5	78,5	35				350
XEZ2210	16	10	5/8"	22		35,5	71,5	28				160
XEZ1812	20	12	3/4"	18		34,5	75,5	26				160
XEZ2012	20	12	3/4"	20		43,5	84,5	35				215
XEZ2212	20	12	3/4"	22		36,5	77,5	28				160
XEZ2512	20	12	3/4"	25		47,5	88,5	39				350
XEZ2516	25	16	1"	25		49	104	39				165
XEZ2816	25	16	1"	28		39	94	29				100
XEZ3016	25	16	1"	30		53	108	43				250
XEZ3020	32	20	1 1/4"	30		53,5	114,5	43				210
XEZ3520	32	20	1 1/4"	35		45,5	106,5	35				100
XEZ3820	32	20	1 1/4"	38		58,5	119,5	48				210
XEZ3824	40	24	1 1/2"	38		59,5	130	48				170
XEZ4224	40	24	1 1/2"	42		47,5	118	36				100

	BEL 90 BES 90	90° METRIC STANDPIPE - ONE PIECE STANDPIJP METRISCH 90° - UIT 1 STUK												
		TIEFFE Part. N.	Hose I.D. Ø interno tubo			E mm		Dimensions (mm)						Maximum WP bar
			DN	Size	Inch			H	L	K	M			
	XEZ900603	5	03	3/16"	6		21	47	37,5	23			415	
	XEZ900803	5	03	3/16"	8		21	47	37,5	23			415	
	XEZ900604	6	04	1/4"	6		24	52	39	21			320	
	XEZ900804	6	04	1/4"	8		24	52	39	23			450	
	XEZ901004	6	04	1/4"	10		24	52	41	25			450	
	XEZ901204	6	04	1/4"	12		24	52	42,5	25			450	
	XEZ901005	8	05	5/16"	10		31	59	45	25			350	
	XEZ901205	8	05	5/16"	12		31	59	45	25			350	
	XEZ901006	10	06	3/8"	10		34	64	48	22			330	
	XEZ901206	10	06	3/8"	12		34	64	49	25			445	
	XEZ901406	10	06	3/8"	14		34	64	52	28			445	
	XEZ901506	10	06	3/8"	15		34	64	48	24			250	
	XEZ901408	12	08	1/2"	14		41	74	57,5	28			275	
	XEZ901508	12	08	1/2"	15		41	74	53,5	24			250	
	XEZ901608	12	08	1/2"	16		41	74	58,5	29			415	
	XEZ901808	12	08	1/2"	18		41	74	55,5	26			160	
	XEZ901810	16	10	5/8"	18		49	85	61,5	26			160	
	XEZ902010	16	10	5/8"	20		49	85	70,5	35			350	
	XEZ902210	16	10	5/8"	22		49	85	60	28			160	
	XEZ901812	20	12	3/4"	18		58	99	69	26			160	
	XEZ902012	20	12	3/4"	20		58	99	78	35			215	
	XEZ902212	20	12	3/4"	22		58	99	71	28			160	
	XEZ902512	20	12	3/4"	25		58	99	82	39			350	
	XEZ902516	25	16	1"	25		74	129	99	39			165	
	XEZ902816	25	16	1"	28		74	129	89	29			100	
	XEZ903010	25	16	1"	30		74	129	96	43			250	
	XEZ903020	32	20	1 1/4"	30		92	153	110	43			210	
	XEZ903520	32	20	1 1/4"	35		92	153	107	35			100	
	XEZ903820	32	20	1 1/4"	38		92	153	115	48			210	
	XEZ903824	40	24	1 1/2"	38		108	179	128	48			170	
	XEZ904224	40	24	1 1/2"	42		108	179	120	36			100	



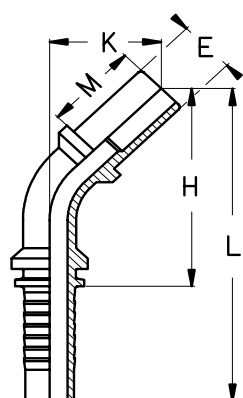


BEL 45 BES 45


45° METRIC STANDPIPE - ONE PIECE STANDPIJP METRISCH 45° - UIT 1 STUK

TIEFFE Part. N.	Hose I.D. Ø interno tubo			E	Dimensions (mm)						Maximum WP bar
	DN	Size	Inch		H	L	K	M			
XEZ450603	5	03	3/16"	6	44,5	70	22,5	23			415
XEZ450803	5	03	3/16"	8	44,5	70	22,5	23			415
XEZ450604	6	04	1/4"	6	48	77	24	21			320
XEZ450804	6	04	1/4"	8	48	76,5	24	23			450
XEZ451004	6	04	1/4"	10	49,5	78	25,5	25			450
XEZ451204	6	04	1/4"	12	50,5	79	26,5	25			450
XEZ451005	8	05	5/16"	10	51,5	80	27,5	25			350
XEZ451205	8	05	5/16"	12	57,5	86	27,5	25			350
XEZ451006	10	06	3/8"	10	62	92,5	27,5	22			330
XEZ451206	10	06	3/8"	12	62,5	93	28,5	25			445
XEZ451406	10	06	3/8"	14	64,5	95	30,5	28			445
XEZ451506	10	06	3/8"	15	61,5	92,5	27,5	24			250
XEZ451408	12	08	1/2"	14	73,5	106,5	34	28			275
XDEZ451508	12	08	1/2"	15	70,5	103,5	31	24			250
XEZ451608	12	08	1/2"	16	74	107	34,5	29			415
XEZ451808	12	08	1/2"	18	72	105	32,5	26			160
XEZ451810	16	10	5/8"	18	86,5	122,5	34	26			160
XEZ452010	16	10	5/8"	20	92,5	128,5	40,5	35			350
XEZ452210	16	10	5/8"	22	85,5	121,5	33	28			160
XEZ451812	20	12	3/4"	18	94,5	135,5	41	26			160
XEZ452012	20	12	3/4"	20	100,5	141,5	47	35			215
XEZ452212	20	12	3/4"	22	96	137	42,5	28			160
XEZ452512	20	12	3/4"	25	103,5	144,5	50	39			350
XEZ452516	25	16	1"	25	131	186	63	39			165
XEZ452816	25	16	1"	28	124	178	56	29			100
XEZ453016	25	16	1"	30	126,5	181,5	58,5	43			250
XEZ453020	32	20	1 1/4"	30	152,5	213,5	69	43			210
XEZ453520	32	20	1 1/4"	35	153	214	69	35			100
XEZ453820	32	20	1 1/4"	38	156	217	72,5	48			210
XEZ453824	40	24	1 1/2"	38	184	254	79	48			170
XEZ454224	40	24	1 1/2"	42	175	246	71	36			100


AGF		METRIC MALE 24° CONE SEAT - FRENCH TYPE METRISCHE BU.DR. KOPPELING 24° CONUS - FRANSE SERIE									
TIEFFE Part. N.	Hose I.D. Ø interno tubo			Thread Filetto	Tube	Dimensions (mm)					
	DN	Size	Inch	F	mm	H	L	E	S		
XMG201304	6	04	1/4"	M20x1,5	13,25	26,7	55,2	13,25	22		
XMG201305	8	05	5/16"	M20x1,5	13,25	26,7	55,2	13,25	22		
XMG201306	10	06	3/8"	M20x1,5	13,25	26,7	57,2	13,25	22		
XMG241706	10	06	3/8"	M24x1,5	16,75	30,2	60,7	16,75	27		
XMG241708	12	08	1/2"	M24x1,5	16,75	30,7	63,7	16,75	27		
XMG302108	12	08	1/2"	M30x1,5	21,25	31,2	64,2	21,25	32		
XMG302110	16	10	5/8"	M30x1,5	21,25	31,2	67,2	21,25	32		
XMG302112	20	12	3/4"	M30x1,5	21,25	31,7	73,2	21,25	32		
XMG362712	20	12	3/4"	M36x1,5	26,75	31,7	73,2	26,75	36		
XMG453316	25	16	1"	M45x1,5	33,50	37,2	92,2	33,50	46		
XMG453324	32	20	1 1/4"	M45x1,5	33,50	38,2	99,2	33,50	46		




BEF		STRAIGHT STANDPIPE - FRENCH TYPE STANDPIJP - FRANSE SERIE									
TIEFFE Part. N.	Hose I.D. Ø interno tubo			E		Dimensions (mm)					
	DN	Size	Inch	mm		H	L	M			
XFZ1304	6	04	1/4"	13,25		29,5	58,0	22			
XFZ1305	8	05	5/16"	13,25		29,5	58,0	22			
XFZ1306	10	06	3/8"	13,25		29,5	60,0	22			
XFZ1706	10	06	3/8"	16,75		31,5	62,0	24			
XFZ1708	12	08	1/2"	16,75		32,5	65,5	24			
XFZ2108	12	08	1/2"	21,25		34,5	67,5	26			
XFZ2110	16	10	5/8"	21,25		34,5	70,5	26			
XFZ2112	20	12	3/4"	21,25		35,3	76,3	26			
XFZ2712	20	12	3/4"	26,75		34,3	75,3	25			
XFZ3316	25	16	1"	33,5		37,3	92,3	27			
XFZ3320	32	20	1 1/4"	33,5		38,0	99,0	27			




DKF		METRIC FEMALE - 24° CONE - LOOSE NUT - FRENCH TYPE METRISCHE SLANGKOPPELING 24° CONUS - FRANSE SERIE									
TIEFFE Part. N.	Hose I.D. Ø interno tubo			Thread Filetto	Tube	Dimensions (mm)					
	DN	Size	Inch	F	mm	H	L	S			
XFG201304	6	04	1/4"	M20x1,5	13,25	23,8	52,3	24			
XFG201305	8	05	5/16"	M20x1,5	13,25	23,8	52,3	24			
XFG201306	10	06	3/8"	M20x1,5	13,25	23,8	54,3	24			
XFG241706	10	06	3/8"	M24x1,5	16,75	27	57,5	30			
XFG241708	12	08	1/2"	M24x1,5	16,75	27,3	60,3	30			
XFG302108	12	08	1/2"	M30x1,5	21,25	30	63	36			
XFG302110	16	10	5/8"	M30x1,5	21,25	30	66	36			
XFG302112	20	12	3/4"	M30x1,5	21,25	30,6	71,6	36			
XFG362712	20	12	3/4"	M36x1,5	26,75	33,6	74,5	41			
XFG453316	25	16	1"	M45x1,5	33,50	33,9	88,9	50			
XFG453320	32	20	1 1/4"	M45x1,5	33,50	34,5	95,5	50			







DKF90		90° METRIC SWEP T ELBOW - 24° CONE - ONE P I E C E - LOOSE NUT - FRENCH TYPE BOCHT 90° METRISCH - CONUS 24° - 1 STUK - LOSSE MOER - FRANSE SERIE												
TIEFFE Part. N.	Hose I.D. Ø interno tubo			Thread Filetto	Tube			Dimensions (mm)						
	DN	Size	Inch	F	mm	H		H	L	K	S			
XFG90201304	6	04	1/4"	M20x1,5	13,25			24,0	53	31,00	24			
XFG90201305	8	05	5/16"	M20x1,5	13,25			31,0	59	34,00	24			
XFG90201306	10	06	3/8"	M20x1,5	13,25			34,0	64	35,00	24			
XFG90241706	10	06	3/8"	M24x1,5	16,75			34,0	64	37,00	30			
XFG90241708	12	08	1/2"	M24x1,5	16,75			41,0	74	42,00	30			
XFG90302108	12	08	1/2"	M30x1,5	21,25			39,0	72	47,30	36			
XFG90302110	16	10	5/8"	M30x1,5	21,25			49,7	85,7	51,00	36			
XFG90302112	20	12	3/4"	M30x1,5	21,25			54,9	95,9	59,00	36			
XFG90362712	20	12	3/4"	M36x1,5	26,75			55,3	96,5	61,30	41			
XFG90453316	25	16	1"	M45x1,5	33,50			54,0	109	75,40	50			
XFG90453320	32	20	1 1/4"	M45x1.5	33,50						50			




DKF45		45° METRIC SWEPT ELBOW - 24° CONE - ONE PIECE - LOOSE NUT - FRENCH TYPE BOCHT 45° METRISCH - CONUS 24° - 1 STUK - LOSSE MOER - FRANSE SERIE										
TIEFFE Part. N.	Hose I.D. Ø interno tubo			E	Tube		Dimensions (mm)					
	DN	Size	Inch	mm	mm		H	L	K	S		
XFG45201304	6	04	1/4"	M20x1,5	13,25		41,5	70,0	21,3	24		
XFG45201305	8	05	5/16"	M20x1,5	13,25		48,6	77,2	21,5	24		
XFG45201306	10	06	3/8"	M20x1,5	13,25		54,3	84,7	21,9	24		
XFG45241706	10	06	3/8"	M24x1,5	16,75					30		
XFG45241708	12	08	1/2"	M24x1,5	16,75		65,0	97,7	23,8	30		
XFG45302108	12	08	1/2"	M30x1,5	21,25					36		
XFG45302110	16	10	5/8"	M30x1,5	21,25		76,5	112,6	30,5	36		
XFG45302112	20	12	3/4"	M30x1,5	21,25		86,7	127,7	31,8	36		
XFG45362712	20	12	3/4"	M36x1,5	26,75		90,4	131,4	36,7	41		
XFG45453316	25	16	1"	M45x1,5	33,50		113,3	168,2	45,5	50		
XFG45453320	32	20	1 1/4"	M45x1,5	33,50					50		

[illegible]




* Straight Komatsu Flange
Flangia Diritta Komatsu

X30808B		12	08	1/2"	1/2"		48,5	81,5	30,2			350
X31208B		12	08	1/2"	3/4"		52,5	85,5	38,1			350
* X31008B		12	08	1/2"	5/8"		49,3	82,3	34,0			350
X30810B		16	10	5/8"	1/2"		46,5	82,5	30,2			350
* X31010B		16	10	5/8"	5/8"		49,3	85,3	34,0			350
X31210B		16	10	5/8"	3/4"		52,5	88,5	38,1			350
X30812B		20	12	3/4"	1/2"		36,0	77,0	30,2			350
X31212B		20	12	3/4"	3/4"		53,5	94,5	38,1			350
X31612B		20	12	3/4"	1"		59,5	100,5	44,5			350
X31216B		25	16	1"	3/4"		61,0	116,0	38,1			280
X31616B		25	16	1"	1"		60,5	115,5	44,5			280
X32016B		25	16	1"	1 1/4"		65,0	120,0	50,8			280
X31620B		32	20	1 1/4"	1"		61,0	122,0	44,5			210
X32020B		32	20	1 1/4"	1 1/4"		65,5	126,5	50,8			210
X32420B		32	20	1 1/4"	1 1/2"		70,0	130,0	60,3			210
X32424B		40	24	1 1/2"	1 1/2"		70,5	141,0	60,3			185
X33224B		40	24	1 1/2"	2"		77,5	147,5	71,4			185
X33232B		50	32	2"	2"		77,0	153,0	71,4			170
X34032B		50	32	2"	2 1/2"		77,5	153,5	84,1			170




* 90° Komatsu Flange
Flangia 90° Komatsu



SFL90		90° SAE J518 FLANGE - 3000 PSI - ONE PIECE FLANGIA 90° SAE J518 - 3000 PSI - INTERA									
TIEFFE Part. N.	Hose I.D. Ø interno tubo			Flange Flangia		Dimensions (mm)					Maximum WP
	DN	Size	Inch	Inch		H	L	K	A		bar
X3900808B	12	08	1/2"	1/2"		41	74	42	30,2		350
X3901208B	12	08	1/2"	3/4"		41	74	47	38,1		350
* X3901008B	12	08	1/2"	5/8"		41	74	44	34,0		350
X3901008B	16	10	5/8"	1/2"		49	85	46	30,2		350
* X3901010B	16	10	5/8"	5/8"		49	85	49	34,0		350
X3901210B	16	10	5/8"	3/4"		49	85	52	38,1		350
X3900812B	20	12	3/4"	1/2"		58	99	51	30,2		350
X3901212B	20	12	3/4"	3/4"		58	99	57	38,1		350
X3901612B	20	12	3/4"	1"		58	99	62	44,5		350
X3901216B	25	16	1"	3/4"		74	129	69	38,1		280
X3901616B	25	16	1"	1"		74	129	69	44,5		280
X3902016B	25	16	1"	1 1/4"		74	129	70	50,8		280
X3901620B	32	20	1 1/4"	1"		92	153	78	44,5		210
X3902020B	32	20	1 1/4"	1 1/4"		92	153	87	50,8		210
X3902420B	32	20	1 1/4"	1 1/2"		92	153	88	60,3		210
X3902424B	40	24	1 1/2"	1 1/2"		108	179	101	60,3		185
X3903224B	40	24	1 1/2"	2"		108	179	104	71,4		185
X3903232B	50	32	2"	2"		142	218	134	71,4		170
X3904032B	50	32	2"	2 1/2"		142	218	143	84,1		170




SFS	STRAIGHT SAE J518 FLANGE - 6000 PSI - ONE PIECE RECHTE FLENS SAE J518 - 6000 PSI - UIT 1 STUK											
TIEFFE Part. N.	Hose I.D. Ø interno tubo			Flange Flangia		Dimensions (mm)						Maximum WP
	DN	Size	Inch	Inch		H	L	A				bar
X60808B	12	08	1/2"	1/2"		49,5	82,5	31,7				415
X61208B	12	08	1/2"	3/4"		52,5	89,0	41,3				415
X60810B	16	10	5/8"	1/2"		53,0	89,0	31,7				350
X61210B	16	10	5/8"	3/4"		59,5	95,5	41,3				350
X60812B	20	12	3/4"	1/2"		45,5	86,5	31,7				350
X61212B	20	12	3/4"	3/4"		60,0	101,0	41,3				350
X61612B	20	12	3/4"	1"		62,5	103,5	47,6				350
X61216B	25	16	1"	3/4"		61,0	116,0	41,3				280
X61616B	25	16	1"	1"		66,5	121,5	47,6				280
X62016B	25	16	1"	1 1/4"		70,5	125,5	54,0				280
X61620B	32	20	1 1/4"	1"		66,0	127,0	47,6				210
X62020B	32	20	1 1/4"	1 1/4"		71,0	132,0	54,0				210
X62420B	32	20	1 1/4"	1 1/2"		80,5	141,5	63,5				210
X62424B	40	24	1 1/2"	1 1/2"		81,0	151,5	63,5				185
X63224B	40	24	1 1/2"	2"		100,0	170,5	79,4				185
X63232B	50	32	2"	2"		100,0	176,0	79,4				172




SFS90		90° SAE J518 FLANGE - 6000 PSI - ONE PIECE FLENS 90° SAE J518 - 6000 PSI - UIT 1 STUK									
TIEFFE Part. N.	Hose I.D. Ø interno tubo			Flange Flangia		Dimensions (mm)					Maximum WP
	DN	Size	Inch	Inch		H	L	K	A		bar
X6900808B	12	08	1/2"	1/2"		41	74	42	31,7		415
X6901208B	12	08	1/2"	3/4"		41	74	50	41,3		415
X6900810B	16	10	5/8"	1/2"		49	85	47	31,7		350
X6901210B	16	10	5/8"	3/4"		49	85	55	41,3		350
X6900812B	20	12	3/4"	1/2"		58	99	52	31,7		350
X6901212B	20	12	3/4"	3/4"		58	99	62	41,3		350
X6901612B	20	12	3/4"	1"		58	99	70	47,6		350
X6901216B	25	16	1"	3/4"		74	129	70	41,3		280
X6901616B	25	16	1"	1"		74	129	75	47,6		280
X6902016B	25	16	1"	1 1/4"		74	129	82	54,0		280
X6901620B	32	20	1 1/4"	1"		92	153	84	47,6		210
X6902020B	32	20	1 1/4"	1 1/4"		92	153	90	54,0		210
X6902420B	32	20	1 1/4"	1 1/2"		92	153	96	63,5		210
X6902424B	40	24	1 1/2"	1 1/2"		108	179	102	63,5		185
X6903224B	40	24	1 1/2"	2"		108	179	118	79,4		185
X6903232B	50	32	2"	2"		142	218	137	79,4		172

[illegible]


SFS90 (Supercat)	90° "SUPERCAT" FLANGE - ONE PIECE FLENS 90° "SUPERCAT" - UIT 1 STUK										
TIEFFE Part. N.	Hose I.D. Ø interno tubo			Flange Flangia		Dimensions (mm)					Maximum WP
	DN	Size	Inch	Inch		H	L	K	A		bar
XC901212	20	12	3/4"	3/4"		58	99	67	41,3		350
XC901612	20	12	3/4"	1"		58	99	75	47,6		350
XC901616	25	16	1"	1"		74	129	80	47,6		280
XC902016	25	16	1"	1 1/4"		74	129	86	54,0		280
XC902020	32	20	1 1/4"	1 1/4"		92	153	94	54,0		210
XC902420	32	20	1 1/4"	1 1/2"		92	153	98	63,5		210
XC902424	40	24	1 1/2"	1 1/2"		108	179	103	63,5		185




SFS45 (Supercat)		45° "SUPERCAT" FLANGE - ONE PIECE FLENS 45° "SUPERCAT" - UIT 1 STUK										
TIEFFE Part. N.	Hose I.D. Ø <i>interno tubo</i>			Flange <i>Flangia</i>		Dimensions (mm)						Maximum WP
	DN	Size	Inch	Inch		H	L	K	A			bar
XC451212	20	12	3/4"	3/4"		94,0	135,0	40,0	41,3			350
XC451612	20	12	3/4"	1"		99,0	140,0	45,0	47,6			350
XC451616	25	16	1"	1"		111,5	170,5	47,5	47,6			280
XC452016	25	16	1"	1 1/4"		120,0	175,0	51,5	54			280
XC452020	32	20	1 1/4"	1 1/4"		141,5	202,5	58,0	54			210
XC452420	32	20	1 1/4"	1 1/2"		144,5	205,5	60,5	63,5			210
XC452424	40	24	1 1/2"	1 1/2"		163,5	234,0	60,0	63,5			185



"KOMATSU" METRIC FEMALE - 60° CONE SEAT - CRIMPED NUT METR. WARTELKOPP. "KOMATSU" - CONUS 60° - GEKROMPEN MOER											
TIEFFE Part. N.	Hose I.D. Ø interno tubo			Thread Filetto F	Dimensions (mm)						
	DN	Size	Inch		H	L	S	S1			
XFMJ1404	6	04	1/4"	M14x1,5	24,0	52,5	19	19			
XFMJ1605	8	05	5/16"	M16x1,5	22,2	50,7	22	19			
XFMJ1406	10	06	3/8"	M14x1,5	24,0	54,5	19	19			
XFMJ1606	10	06	3/8"	M16x1,5	22,2	52,7	22	19			
XFMJ1806	10	06	3/8"	M18x1,5	24,3	54,8	24	19			
XFMJ2208	12	08	1/2"	M22x1,5	26,5	59,5	27	27			
XFMJ2408	12	08	1/2"	M24x1,5	29,9	62,9	32	32			
XFMJ2410	16	10	5/8"	M24x1,5	29,9	65,9	32	32			
XFMJ3012	20	12	3/4"	M30x1,5	33,0	74,0	36	36			
XFMJ3316	25	16	1"	M33x1,5	34,5	89,5	41	36			
XFMJ3620	32	20	1 1/4"	M36x1,5	42,6	103,6	46	46			
XFMJ4224	40	24	1 1/2"	M42x1,5	43,5	114,0	50	50			




"TOYOTA" B.S.P. FEMALE - 60° CONE SEAT - CRIMPED NUT BSP WARTELKOPP. "TOYOTA" - CONUS 60° - GEKROMPEN MOER											
TIEFFE Part. N.	Hose I.D. Ø interno tubo			Thread Filetto F	Dimensions (mm)						
	DN	Size	Inch		H	L	S	S1			
XBFJ0404	6	04	1/4"	1/4"	21,8	50,3	19	17			
XBFJ0606	10	06	3/8"	3/8"	22,5	53,0	22	19			
XBFJ0808	12	08	1/2"	1/2"	25,2	58,2	27	22			
XBFJ1212	20	12	3/4"	3/4"	29,7	70,7	32	27			
XBFJ1616	25	16	1"	1"	34,3	89,3	41	32			
XBFJ2020	32	20	1 1/4"	1 1/4"	37,0	98,0	50	41			
XBFJ2424	40	24	1 1/2"	1 1/2"	40,2	110,7	55	50			



DKOK WASHCLEANER FEMALE - "FK" TYPE CLEANER SLANGKOPPELING - TYPE "FK"											
TIEFFE Part. N.	Hose I.D. Ø interno tubo			Thread Filetto F	Dimensions (mm)						
	DN	Size	Inch		H	L	D				
XKF221404	6	04	1/4"	M22x1,5	36,5	65	14				
XKF221405	8	05	5/16"	M22x1,5	36,5	65	14				
XKF221406	10	06	3/8"	M22x1,5	36,5	67	14				

PISTOL WASHCLEANER JUNCTION SLANGKOPPELING PISTOOL CLEANER											
TIEFFE Part. N.	Hose I.D. Ø interno tubo					Dimensions (mm)					
	DN	Size	Inch			H	L				
XZKO1004	6	04	1/4"			34,5	63,0				
XZKO1005	8	05	5/16"			34,5	63,0				



DOUBLE INSERT DUBBEL NIPPEL											
TIEFFE Part. N.	Hose I.D. Ø interno tubo					Dimensions (mm)					
	DN	Size	Inch			H	L				Maximum WP bar
XW0404	6	04	1/4"			13	70				450
XW0505	8	05	5/16"			13	70				350
XW0606	10	06	3/8"			13	74				445
XW0808	12	08	1/2"			15	81				415
XW1010	16	10	5/8"			15	87				350
XW1212	20	12	3/4"			17	99				350
XW1616	25	16	1"			20	130				280
XW2020	32	20	1 1/4"			21	143				210

